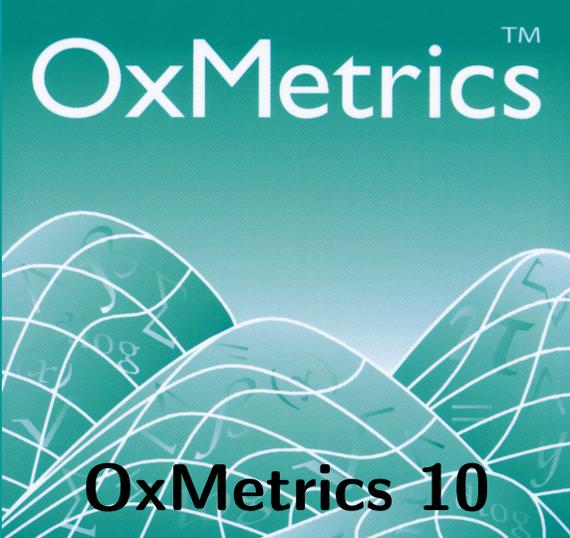


Jurgen A. Doornik and Marius Ooms

**Introduction to the Ox
Programming Language**

OxTM 10

OxMetricsTM

The graphic features the text 'OxMetrics 10' in a bold, black, sans-serif font. The text is centered over a background of white, overlapping, curved lines that resemble a network or data flow. The background is a light teal color with a subtle gradient.

OxMetrics 10

Published by Timberlake Consultants Ltd – timberlake.co
www.oxrun.dev, doornik.com

Ox™ 10

An Object-oriented Matrix Programming Language

Copyright ©2026 Jurgen A Doornik and Marius Ooms

First published by Timberlake Consultants in 1998

Revised in 2006, 2026

All rights reserved. No part of this work, which is copyrighted, may be reproduced or used in any form or by any means – graphic, electronic, or mechanical, including photocopy, record taping, or information storage and retrieval systems – without the written consent of the Publisher, except in accordance with the provisions of the Copyright Designs and Patents Act 1988.

Whilst the Publisher has taken all reasonable care in the preparation of this book, the Publisher makes no representation, express or implied, with regard to the accuracy of the information contained in this book and cannot accept any legal responsibility or liability for any errors or omissions from the book, or from the software, or the consequences thereof.

In memory of Marius Ooms

Contents

Front matter	i
Contents	v
Preface	ix
1 Ox Environment	1
1.1 Installing Ox	1
1.2 Ox version	1
1.3 Help and documentation	1
1.4 Running an Ox program	2
1.4.1 oxrun.dev	2
1.4.2 OxEdit	3
1.4.3 OxMetrics	5
1.4.4 Command line: oxl	5
1.4.5 Differences	6
1.5 Graphics	6
1.6 Compilation and run-time errors	6
1.7 Have you programmed before?	7
2 Syntax	8
2.1 Introduction	8
2.2 Comment	8
2.3 Program layout	9
2.4 Statements	10
2.5 Identifiers	11
2.6 Style	11
2.7 Matrix constants	12
2.8 Creating a matrix	13
2.9 Using functions	14
2.9.1 Simple functions	14
2.9.2 Function arguments	15
2.9.3 Returning a value	15

2.9.4	Multiple returns	17
2.9.5	Function declaration	17
2.9.6	Importing code	18
2.9.7	Returning values in an argument	18
3	Operators	20
3.1	Introduction	20
3.2	Index operators	20
3.3	Matrix operators	21
3.4	Dot operators	24
3.5	Relational and equality operators	24
3.6	Logical operators	25
3.7	Assignment operators	26
3.8	Conditional operators	27
3.9	And more operators	28
3.10	Operator precedence	28
4	Input and Output	30
4.1	Introduction	30
4.2	Using paths in Ox	31
4.3	Using OxMetrics or Excel	31
4.4	Matrix file (.mat)	31
4.5	Spreadsheet files	32
4.6	Ox/OxMetrics/PcGive data files (oxdata, .in7/.bn7)	32
4.7	What about regressor names?	33
4.8	Finding that file	33
5	Program Flow and Program Design	35
5.1	Introduction	35
5.2	for loops	35
5.3	while loops	36
5.4	break and continue	37
5.5	foreach loops	37
5.6	parallel for loops	38
5.7	Conditional statements	38
5.8	Vectorization	39
5.9	Functions as arguments	40
5.10	Importing code	42
5.11	Global variables	43
5.12	Program organization	45
5.13	Lambda functions	46
5.14	Style and Hungarian notation	48

6	Graphics	50
6.1	Introduction	50
6.2	Example	50
7	Strings, Arrays and Print Formats	52
7.1	Introduction	52
7.2	String operators	52
7.3	The <code>sprint</code> function	53
7.4	Escape sequence	53
7.5	Print formats	54
7.6	<code>scan</code>	55
7.7	Arrays	55
	7.7.1 Keyword arrays	55
7.8	Missing values	56
7.9	Infinity	57
8	Object-Oriented Programming	58
8.1	Introduction	58
8.2	Using object oriented code	58
8.3	Writing object-oriented code	60
8.4	Inheritance	61
9	Summary	64
9.1	Style	64
9.2	Functions	64
9.3	Efficient programming	64
9.4	Computational speed	65
9.5	Noteworthy	65
10	Using Ox Classes	66
10.1	Introduction	66
10.2	Regression example	67
10.3	Simulation example	68
10.4	MySimula class	71
	10.4.1 The first step	71
	10.4.2 Adding data members	72
	10.4.3 Inheritance	73
	10.4.4 Virtual functions	74
	10.4.5 Last step	75
10.5	Conclusion	75

11 Example: probit estimation	76
11.1 Introduction	76
11.2 The probit model	76
11.3 Step 1: estimation	78
11.4 Step 2: Analytical scores	80
11.5 Step 3: removing global variables: the Database class	82
11.6 Step 4: independence from the model specification	83
11.7 Step 5: using the Modelbase class	84
11.7.1 Switching to the Modelbase class	84
11.7.2 Splitting the source code	86
11.7.3 Putting it all together: bprobit.ox and bprobit.oxh	87
11.7.4 Interactive use using OxMetrics	89
11.7.5 Extending the interface	89
11.8 A Monte Carlo experiment	90
11.8.1 Extending the class	90
11.8.2 One replication	90
11.8.3 Many replications	91
11.8.4 Parallel Monte Carlo	93
11.9 Conclusion	94
A1 A debug session	95
References	99
Subject Index	101

Preface

This is a hands-on introduction to the Ox programming language. It may be used for self study, or in a classroom setting with an instructor. Exercises are spread throughout the text, both to check and extend the understanding of the language. Some more extensive exercises are given, which may be set as take home tests for students (for example, the questions at the end of Chapter 11). Not all details of the language are discussed here; for more information we refer to [Doornik \(2026\)](#), which contains a full reference of the Ox language.

We hope that a working knowledge of the material in this booklet will allow you to use Ox more productively, whether in your studies or research. Please let us know if you have any comments on this introduction.

It is assumed that you have a copy of Ox installed on your machine and working. If not, you can download a copy from <https://oxlang.dev>.

Some conventions are used in this book. Source code, variables in source code and file names are written in typewriter font. Exercises are indicated with a ► in the margin, and referred to as [3.1] (for example), where 3 is the chapter number, and 1 the exercise number in that chapter. Sections are referred to as e.g. §3.1. Source code is listed in a grey box. For many of these the code is provided to save typing. In that case, the upper-right corner of the box the filename in *italics*. All the files will have the .ox extension, although some of those will not be valid Ox code as such (the file is always an exact copy of the code in the text, and occasionally this is only part of a program).

We wish to thank Francisco Cribari-Neto for helpful comments.

Jurgen Doornik, <https://doornik.com>

Marius Ooms

Chapter 1

Ox Environment

1.1 Installing Ox

You can try and learn Ox directly in the browser at <https://oxrun.dev>.

Alternatively, use the more powerful installed version to support large memory access and make use of all computational cores on your computer.

Ox Console can be downloaded from <https://oxlang.dev>. Or contact Timberlake Consultants for OxMetrics. Timberlake can be found on the internet at <https://www.timberlake.co>.


1.2 Ox version

You can follow these tutorials using Ox version 10 or newer, on any available computer platform. Parts of Chapter 11 require OxMetrics.

1.3 Help and documentation

The reference book for the Ox language is [Doornik \(2026\)](#). Much of that is also available in the online help. This help system is in the form of web pages and pdf documents, which can be read with a browser. The help files can be found at <https://oxlang.dev/doc/ox>. After installation, it also sits in the doc/ox folder of the Ox installation; the entry point is `index.html`. You can start this directly from the

installation, or, more conveniently, from the Ox icon on the left-hand side of OxMetrics and OxEdit. The entries at the top left of the help system give access to the table of *Contents*, and to the *Index*. The capture shows the help on `rank`:

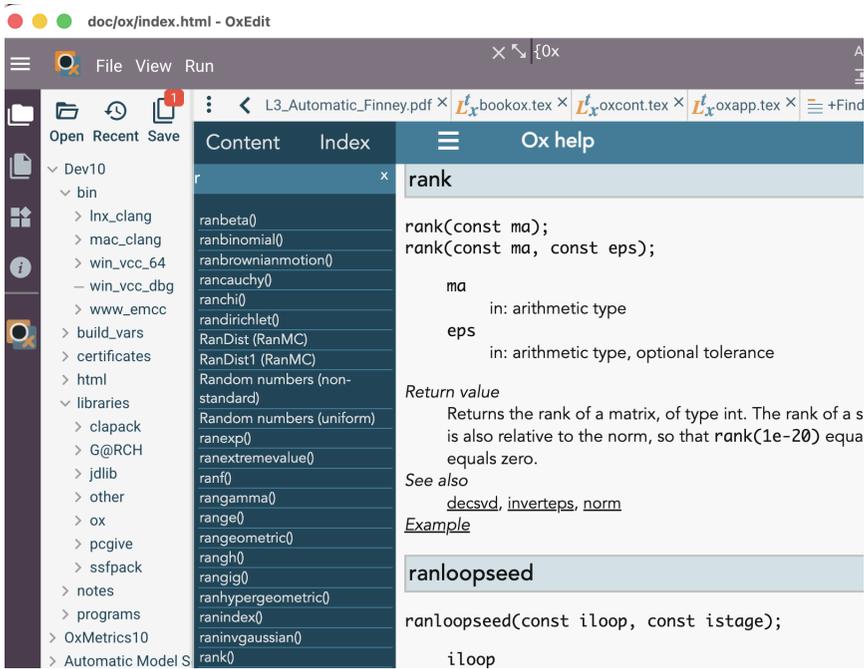

- [1.1] Use the help index to find help on the `rows()` function. Explore other functions and other parts of the help system. You may also use search option at the top of the index.


1.4 Running an Ox program

Ox programs can be run in several ways, each differing in where the text and graphical output appears (or can be seen at all). We shall consider several in turn.

Each of these are available under macOS, linux, and Windows, introducing minor variations. First, we show that Ox can be used directly in the browser as well.

1.4.1 `oxrun.dev`

To run some Ox code without installing OxMetrics or Ox console, go to <https://oxrun.dev>. This may take some time to load on a slow connection. When ready, you can run the sample program `new0.ox` that is opened by default.

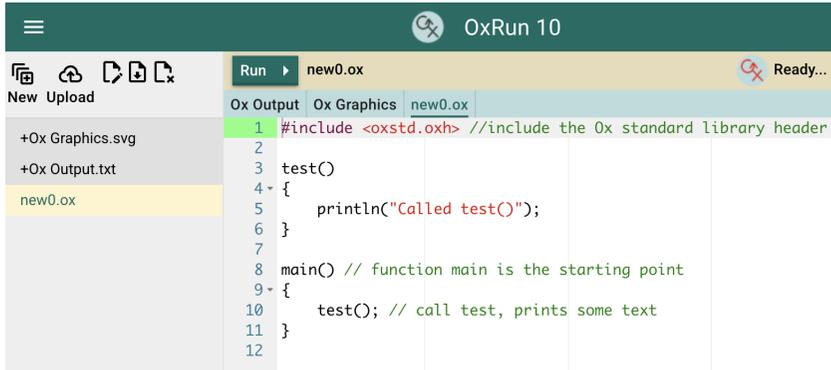

This is convenient for learning Ox: all the sample code for this *Introduction to Ox* can be loaded from the New button.

The browser version has some limitations compared to the installed version: it is more difficult to build on top of existing code or packages. It is also a bit slower because it is single-threaded and running in the browser. The advantage is that you can also try it on a phone or ipad: modern phones are even fast enough to run Monte Carlo simulations!

Many examples in this book have a direct link to open the code in `oxrun.dev`. Use Ctrl+click (Windows, linux) or Cmd+click (macOS) on the name in the top-right of the following example taken from the next chapter:

```

#include <oxstd.oxh>
main()
{
    decl n, sigma, x, beta, eps;

    n = 4; sigma = 0.25;
    x = 1 ~ ranu(n, 2);
    beta = <1; 2; 3>;

    eps = sigma * rann(n, 1);

    println("x", x, "beta", beta, "epsilon", eps);
}

```

[oxintro2c>oxrun.dev](https://oxintro2c.com/oxrun.dev)

This will open a new tab in your default browser with the code ready to run.

1.4.2 OxEdit

When Ox Console is installed, the OxEdit front-end is part of it.

1. Start OxEdit.
2. Open the OxMetrics10 folder that was created in your Documents folder.
3. Then from there, find `myfirst.ox`, and open it
4. Run the code by clicking on the Run button:

```

1 #include <oxstd.ox> //include the Ox standard library header
2
3 main()                // function main is the starting point
4 {
5     decl m1, m2;      // declare two variables, m1 and m2
6
7     m1 = unit(3);     // assign to m1 a 3 x 3 identity matrix
8     m1[0][0] = 2;    // set top-left element to 2
9     m2 = <0,0,0;1,1,1>; //m2 is a 2 x 3 matrix, the first row
10                    // consists of zeros, the second of ones
11
12     println("two matrices", m1, m2); // print the matrices
13 }
14
15

```

There are several features to make programming easier. Syntax highlighting makes code easier to read, and helps spot some mistakes. You can select of block of lines, and then use Toggle Comment to temporarily comment code out.

And very importantly, there is context sensitive help. For example, put the text cursor inside the word `println` in `myfirst.ox`. Then press the F1 key:

Content Index | **Ox help**

`println` x | `print, println,`

```

println()
println()
println()

```

`print(const a, ...);`
`println(...);`

`a`
in: any type

`...`
in: any type

Return value
Returns the number of arguments supplied to the function.

Description
Each argument is printed to stdout using default formatting. A formatting string can be input in the input stream: a formatting string starts with a % symbol, and is followed by one or more characters. If a formatting string is encountered, it is not printed, but applied to the next argument.

The output will appear in a new window, entitled Ox Output¹.

Finally, a mistake, e.g., to omit the closing `)` parentheses at the end of the `println` statement, results in an error message:

¹The output window is called `myfirst.out` in OxMetrics

```

1 ----- Ox on 2026-01-23T07:35:07.653Z
2 ----- OxMetrics10/ox/samples/myfirst.ox
3
4 Ox 10.04 (macOS_64/Parallel) (C) J.A. Doornik, 1994-2025 (oxlang.dev)
5 two matrices
6      2.0000      0.00000      0.00000
7      0.00000      1.0000      0.00000
8      0.00000      0.00000      1.0000
9
10     0.00000      0.00000      0.00000
11     1.0000      1.0000      1.0000
12
13 ----- Ox on 2026-01-23T07:39:09.534Z
14 ----- OxMetrics10/ox/samples/myfirst.ox
15
16 Ox 10.04 (macOS_64/Parallel) (C) J.A. Doornik, 1994-2025 (oxlang.dev)
17 OxMetrics10/ox/samples/myfirst.ox (12): ')' expected but found ;
18

```

Just Ctrl-click (Cmd-click on macOS) on the line with the error, and OxMetrics will jump straight to the location in the source code.

It is important to note that Ox programs can only be run from an open folder! Trying to run file that is opened in another way (e.g. through Save As to an unopened folder), results in an error message.

1.4.3 OxMetrics

OxMetrics is an extended version of OxEdit which includes interactive econometric modelling apps such as PcGive, STAMP and G@RCH. By the way: these have all themselves been written in Ox!

Using OxMetrics to run an Ox program is the same as OxEdit, except for the name of the output window.

1.4.4 Command line: oxl

Finally, we consider the command line, either from a terminal window under macOS/Linux, or a command prompt under Windows.

- Under macOS and linux, the `oxl` and `ox10` commands have been installed to `usr/local/bin`, linking to the installed executables. So try

```
oxl
```

to see command line help. Or

```
oxl samples/myfirst
```

to run `myfirst.ox`. The `oxl` program will run the `samples/myfirst.ox` program from the Ox installation root folder.

- Under Windows enter

```
start /w/b oxl
```

to see command line help. Or

```
start /w/b oxl samples\myfirst
```

to run `myfirst.ox` from the `samples` folder in the Ox installation. The `start /w/b` command is used because the folder with `oxl.exe` is *not* added to the PATH statement upon installation. However, you can do this yourself if you wish to do so.

- [1.2] We suggest that you now try to run an Ox program using the methods described above.

If the output is:

```
myfirst.ox (1): 'oxstd.oxh' include file not found
myfirst.ox (7): 'unit' undeclared identifier
myfirst.ox (11): 'print' undeclared identifier
```

then the installation has failed.

Output from the console version appears on the console. To capture it in a file, *redirect* the output, e.g. to `myprog.out` as in:

```
oxl samples/myfirst.ox > myfirst.out
```

For Windows:

```
start /w/b oxl samples\myfirst.ox > myfirst.out
```

1.4.5 Differences

There are a few substantive difference between versions:

	Graph display	Graph editing	Call DLLs	Speed
oxrun.dev	✓	×	×	+
OxEdit	✓	×	✓	+++
OxMetrics	✓	✓	✓	+++
oxl	×	×	✓	+++
oxmetrics.dev	✓	✓	✓ [‡]	+

[‡]Only wasm dlls are supported.

1.5 Graphics

Creating and showing graphs is discussed in Chapter 6.

1.6 Compilation and run-time errors

Program statements are processed in two steps, resulting in two potential types of errors:

(1) Compilation errors

The statements are scanned in and compiled into an efficient internal code. Errors which occur at this stage are compilation errors. No statements are executed when there is a compilation error. Compilation errors could be caused by undeclared variables, wrong number of function arguments, forgetting a semicolon at the end of a statement (among many other reasons). For example, these two messages are caused by one undeclared variable at line 10 of the program:

```
D:\Waste\myfirst.ox (10): 'y' undeclared identifier
D:\Waste\myfirst.ox (10): lvalue expected
```

Occasionally, a syntax error leads to a large list of error messages. Then, correcting the first mistake could well solve most of the problems.

(2) Run-time errors

When the code which does not have syntax errors is executed, things can still go wrong, resulting in a run-time error. An example is trying to multiply two matrices which have non matching dimension. Here, this happened at line 10 in the main function:

```
Runtime error: 'matrix[3][3] * matrix[2][3]' bad operand
Runtime error occurred in main(10), call trace:
D:\Waste\myfirst.ox (10): main
```

1.7 Have you programmed before?

If not, there is a lot to learn initially: not just a new language but also basic programming concepts which take some time to master. Some persistence is required too: a compiler (that is the program which translates your program into something that can run on a computer) is unforgiving. Forget a comma here, or a semicolon there, and your program will not work at all.

Before continuing it is useful to ask the following question: do I need to solve problems which require Ox? If the main objective is regression analysis, then there will be several menu-driven programs (such as, e.g., PcGive) which are easier to use. But, if you need to do something slightly different, or do very extensive computations, Ox can be a powerful tool to solve the problem.

If you decide to use Ox and work through this tutorial, you will learn about programming and about Ox. Because of its simplicity and similarity to C, C++, Javascript, and Java, this is not a bad place to start. Moreover, you can immediately apply it to more relevant subject matter (econometrics, statistics, etc.). Ox differs from Python because blocks are defined through curly braces rather than indentation. And from R e.g. because a dot is not a letter, but used for member access. Ox is also a matrix language with matrix operators, rather than a vector language.

As you will see in the upcoming chapters, the basic building blocks of an Ox computer program are *variables* and *functions* (sometimes called procedures or subroutines). A variable is like a box in which you can store a number. A function is like a recipe: it takes some variables as inputs (the ingredients), and gives output back. The purpose of a function is to isolate tasks which have to be used several times. Functions also help to break a program down in more manageable blocks. Finally, the complete program is all the variables and functions put together.

To make reusable modules, and to create nicely structured code, we package the variables and functions in a *class*. This is introduced in Chapter 8.

Chapter 2

Syntax

2.1 Introduction

This chapter gives a brief overview of the main syntax elements of the Ox language. The most important features of the Ox language are:

- The *matrix* is a standard type in Ox. You can work directly with matrices, for example adding or multiplying two matrices together. Ox also has the standard scalar types for integers (type `int`), and real numbers (type `double`).
A vector is a matrix with one column or one row, whereas a 1×1 matrix is often treated as a scalar. Ox will keep track of matrix dimensions for you.
- Variables are *implicitly typed*. So a variable can start as an integer, then become a 10×1 matrix, then a 2×2 matrix. and so on. As in most languages, variables must be *explicitly declared*.
- Ox has strings and arrays as built-in types, to allow for higher dimensional matrices, or arrays of strings.
- Ox has an extensive numerical, statistical, and graphical library.
- Ox allows you to write object-oriented code (this is an optional feature).

Loops and conditional statements in Ox are similar to C, C++, Javascript, Typescript, etc., so if you're familiar with these languages, you'll recognize the structure of Ox code. But, there are differences as well, as you'll see shortly.

2.2 Comment

Ox has two types of comment: `/* ... */` for blocks of comment, and `//` for comment up to the end of a line:

```
/*  
    This is standard comment, which /* may be nested */.  
*/  
decl x; // declare the variable x
```

When writing functions, it is useful to add comment to document the function, especially the role of the arguments, and the return value. A useful system is provided in `ox/packages/oxdoc`. An example is shown below:

```

oxintro2a
/** Saves the database to the specified file.
 * @param file, string with filename, the filetype is
 * derived from the filename extension.
 * @returns FALSE if saving failed, TRUE otherwise.
 * @comment Taken from Database class (see ox/src).
 * NB. this file cannot be run.
 */
Database::Save(const file)
{
  // code removed ...
}

```

Oxdoc comment is an enriched version of standard block comment, starting with `/**`. Html pages can automatically be generated from the source code by the `oxdoc` package. Good documentation is important: often, it is better to have documentation and no code, than the other way round.

2.3 Program layout

Our first complete program is:

```

oxintro2b
#include <oxstd.oxh>

main()
{
  println("Hello world");
}

```

This program does only print a line of text, but is worth discussing anyway:

- The first line includes a *header file*. The contents of the file `oxstd.oxh` are literally inserted at the point of the `#include` statement. The name is between `<` and `>` to indicate that it is a *standard* header file: it actually came with the Ox system. The purpose of that file is to declare all standard library functions, so that they can be used from then onwards.
- This short program has one *function*, called `main`. It has no arguments, hence the empty parentheses (these are compulsory). An Ox program starts execution at the `main` function; without `main`, there might be a lot of code, but nothing will happen.
- A block of code (here the *function body* of the `main` function), is enclosed in curly braces.

Most Ox code presented in this books uses syntax ‘colouring’: comment is shown as italic, and reserved words (also called keywords) are bold. Both OxMetrics and OxEdit use syntax colouring. This is a purely visual aide, the actual Ox code is a plain text file.

2.4 Statements

Statements are commands to do something, some computation for example. Important ingredients of statements are variables, to store or access a result, and operators (discussed in the next chapter) to combine existing results into new ones. A statement is terminated with a semicolon (;). Please note when you're copying code from paper: Ox makes a distinction between lower case and upper case letters.

```

#include <oxstd.oxh> oxintro2c>oxrun.dev

main()
{
    decl n, sigma, x, beta, eps;

    n = 4; sigma = 0.25;
    x = 1 ~ ranu(n, 2);
    beta = <1; 2; 3>;

    eps = sigma * rann(n, 1);

    println("x", x, "beta", beta, "epsilon", eps);
}

```

Some remarks on this program:

- `decl` is used to declare the variables of this program.
- `n = 4` simply assigns the integer value 4 to the variable `n`.
- `sigma = 0.25` simply assigns a real value.
- `;` terminates each statement.
- `ranu` and `rann` are library functions for generating uniform and normal random numbers.
- `println` is a standard library function used for printing.
- `*` multiplies two variables.
- `~` concatenates two variables. Here we concatenate an integer with a 4×2 matrix. The process can be pictured as:

$$1 \sim \begin{pmatrix} x & x \\ x & x \\ x & x \\ x & x \end{pmatrix} \Rightarrow \begin{pmatrix} 1 & x & x \\ 1 & x & x \\ 1 & x & x \\ 1 & x & x \end{pmatrix}.$$

- ▶[2.1] Start by running the Ox program listed above. Note that all the program listings which have a name in the top-right corner of the box are installed with Ox, in the `ox/tutorial` folder. So the file to be run is called `oxintro2c.ox`.
- ▶[2.2] Use the help system to discover the meaning of `ranu` and the difference between `print` and `println`.
- ▶[2.3] Add a line for computing $y = X\beta + \epsilon$. Also print the value of y . This requires:

1. declaring the variable `y`
 2. inserting a statement computing $X\beta + \epsilon$ and storing it in `y`
 3. adding a statement to print the `y` variable.
- [2.4] The `rows()` and `sizeR()` functions returns the number of rows of a matrix, the `columns()` and `sizeC()` functions the number of columns. Add a print statement to report the dimensions of `x` in the above program. Use the help system to discover the difference between `columns()` and `sizeC()`.

Here are some of the things which can go wrong in the previous exercises:

1. Forget a comma. For example `decl a, b c;` needs a comma after the `b`.
2. Forget a semicolon, as for example in: `n = 4 sigma = 0.25;`
3. Adding a semicolon after the function header, as in:

```
main();
{
}
```

4. Omitting the curly braces, as in:

```
main()
{
    print("some text");
}
```

5. Forget to declare a variable. The new `y` variable must be declared before it can be used.
6. Any typo, such as writing `priny` instead of `print`.
7. In some parts of the world a comma is used as a decimal separator. `Ox` uses a dot. Perhaps surprisingly at this stage, this is valid code:

```
sigma = 0,25;
```

but it will set `sigma` to zero.

8. Using the wrong case: `print(X)`; would not work, because the variable is called `x`, not `X`.
9. Matrix dimensions do not match in multiplication:

$$\begin{pmatrix} x & x & x \\ x & x & x \\ x & x & x \\ x & x & x \end{pmatrix} * \begin{pmatrix} x \\ x \end{pmatrix} \text{ fails, but } \begin{pmatrix} x & x & x \\ x & x & x \\ x & x & x \\ x & x & x \end{pmatrix} * \begin{pmatrix} x \\ x \\ x \end{pmatrix} \text{ works.}$$

2.5 Identifiers

Identifiers (names of variables and functions) may be up to 60 characters long. They may consist of the characters [A-Z], [a-z], [_], and [0-9], but may not start with a digit.

2.6 Style

It is useful to raise the issue of programming style at this early stage. A consistent style makes a program more readable, and easier to extend. Even in the very small programs

of these tutorials it helps to be consistent. Often, a program of a few lines grows over time as functionality is added. With experience, a good balance between conciseness and clarity will be found.

Here is one solution to the previous exercise:

```
#include <oxstd.oxh>

main()
{
    decl n, sigma, x, y, beta, eps;

    n = 4; sigma = 0.25;
    x = 1 ~ ranu(n, 2);
    beta = <1; 2; 3>;

    eps = sigma * rann(n, 1);
    y = x * beta + eps;

    println("x", x, "beta", beta, "epsilon", eps);
    println("y", y);
    println("x has ", sizer(x), " rows and ",
           sizer(x), " columns\n");
}
```

But this solution will work too:

```
#include <oxstd.oxh>
main()
{decl n,x1,x,y,x2,x3;
n=4;x1=0.25;x=1~ranu(n,2);
x2=<1;2;3>;x3=x1*rann(n,1);
y=x*x2+x3;
println("x",x,"beta",x2,"epsilon",x3);
println("y",y);
println("x has ",rows(x)," rows and ",
columns(x)," columns\n");}
```

Later on (in §5.14) we shall introduce a system of name decoration, which will increase the readability of a computer program. For example, we would prefix all global variables with `g_`, such as `g_dMisval` (but we shall do our best to avoid global variables as much as possible).

2.7 Matrix constants

The previous code used various types of constants: 4 is an integer constant, 0.25 is a double constant, and "x" is a string constant. Most interesting is the value assigned to `beta`, which is a *matrix constant*. This is a list of numbers inside `<` and `>`, where a comma separates elements within a row, and a semicolon separates rows. Remember that you can only use numbers in a matrix constant, no variables: so `<1,2,sigma>` is illegal. In that case use `1~2~sigma` (see §3.3).

►[2.5] Write a program which assigns the following constants to variables, and prints the results:

```
<1,2,3>
<11,12,13; 21,22,23; 31,32,33>
<1:6>
```

2.8 Creating a matrix

There are several ways to create a matrix in Ox, as the following examples show.

- Using matrix constants:

```
#include <oxstd.oxh>

main()
{
    decl x = <1, 2, 3>;
    println("x", x);
}
```

- Reading matrices directly from disk is discussed in Chapter 4.
- Using library functions such as `unit`, `zeros`, `ones`:

```
#include <oxstd.oxh>

main()
{
    decl x = zeros(2,3);
    decl y = unit(2);
    println("x", x, "y", y);
}
```

Some of the relevant library functions are:

- `zeros(r,c)` creates an $r \times c$ matrix of zeros;
- `ones(r,c)` creates an $r \times c$ matrix of ones;
- `unit(r)` creates an $r \times r$ identity matrix;
- `constant(d,r,c)` creates an $r \times c$ matrix filled with d 's;
- `range(i,j)` creates an $1 \times j - i + 1$ matrix with $i, i + 1, \dots, j$.

- Using matrix concatenation:

```
#include <oxstd.oxh>

main()
{
    decl x = (0 ~ 1) | (2 ~ 3);
    println("x", x);
}
```

Concatenation works as follows:

~ horizontal concatenation

$$0 \sim 1 \rightarrow (0 \ 1)$$

| vertical concatenation

$$0 \mid 1 \rightarrow \begin{pmatrix} 0 \\ 1 \end{pmatrix}$$

The code uses parentheses to ensure that the two horizontal concatenations are done first. Ox always does horizontal before vertical concatenation, so the parentheses are redundant. When in doubt it is better to write them anyway.

2.9 Using functions

The function is a fundamental building block when writing Ox programs. Functions allow for splitting complex tasks up in manageable bits. The best ones are those which only interact with the outside via the arguments (the inputs) and the return value (the outputs, if any). Then, when there are no external variables used inside the function, the function can be treated as an isolated piece of code: the only thing which matters is the documentation of the function.

Up to this point, only one function has been used, the `main` function. Execution of an Ox program starts at `main`, from which other functions are called; there is no action outside functions. Ox comes with a vast library of functions for your convenience. These are all documented in the help and the Ox book. Whether a function is written in C, and added to the Ox system (as for the standard library), or written in Ox itself (such as the maximization functions and the Database class), does not make any difference to the user of the function.

2.9.1 Simple functions

The most simple Ox function has no arguments, and returns no value. The syntax is:

```
function_name ()  
{  
    statements  
}
```

For example:

```
#include <oxstd.oxh>  
  
sometext()  
{  
    println("Some text");  
}  
  
main()  
{  
    sometext();  
}
```

We've created the `sometext` function, and call it from the `main` function. When the program is run, it just prints `Some text`. Note that, to call the function, the empty parentheses are required.

2.9.2 Function arguments

A function can take arguments. In the header of the function code, the arguments are listed, separated by comma's. This example takes one argument:

```
#include <oxstd.oxh> oxintro2d>oxrun.dev

dimensions(const mX)
{
    println("the argument has ", rows(mX), " rows");
}

main()
{
    dimensions( zeros(40, 5) );
}
```

The `const` which precedes each argument indicates the function is only accessing the value, not changing it. Although any change made to `mY` or `mX` is only local to the function (once the function returns, both will have their old values back), using `const` wherever possible results in clearer code.¹

►[2.6] Modify the `dimensions` function to give it two arguments. Then print the number of rows in both arguments.

2.9.3 Returning a value

The `return` statement returns a value from the function, *and also exits the function*. So, when the program flow reaches a `return` statement, control returns to the caller, without executing the remainder of the function. The syntax of the `return` statement is:

```
return return_value ;
```

Or, to exit from a function which does not have a return value:

```
return;
```

For example, computing OLS estimates:

```
MyOls1(const mY, const mX)
{
    return (mX'mX)^-1 * (mX'mY);
}
```

Or, using the library function `olsc` as shown in the next example. This is also more stable and efficient.

The next program estimates and prints the coefficients of the linear regression model. The dependent variable is in the $n \times 1$ vector `mY`, and the regressors in the $n \times k$ matrix `mX`. The `&b` part is explained below. Any local variable (here: `b`) must be declared; `b` only exists while the function is active. With `return` the result is returned to the caller, and the function exited

¹In early versions of Ox, `const` was also more efficient. This is no longer the case: internally, Ox assumes the argument is constant until it is not.

```
oxintro2e>oxrun.dev
```

```

#include <oxstd.oxh>

MyOls(const mY, const mX)
{
    decl b;

    olsc(mY, mX, &b);
    println("in MyOls(): b=", b);
    return b;
}

main()
{
    // mY argument, mX argument, both just random
    decl beta = MyOls( rann(10, 1), ranu(10, 2) );
    // beta now holds the result
    println("in main(): beta=", beta);
}

```

- ▶[2.7] In MyOls, move the line with the return statement to above the print statement and compare the output with the old version.
- ▶[2.8] Test the function using the program given underneath: the task is to use MyOls() for the regression. The data are observations on the weight of chickens (y) versus the amount of feed they were given (X). The data source is Judge, Hill, Griffiths, Lütkepohl, and Lee (1988, Table 5.3, p.195).

```
oxintro2f>oxrun.dev
```

```

#include <oxstd.oxh>

MyOls(const mY, const mX)
{
    decl b;
    olsc(mY, mX, &b);
    return b;
}

main()
{
    decl y = <0.58; 1.1; 1.2; 1.3; 1.95;
           2.55; 2.6; 2.9; 3.45; 3.5;
           3.6; 4.1; 4.35; 4.4; 4.5>;
    decl x1 = <1 : 15>'; // note transpose!
    decl mx = 1 ~ x1 ~ x1 .^ 2; // regressors
    println(y ~ mx); // print all data

    // 2do: use MyOls to regress y on mx & print results
}

```

2.9.4 Multiple returns

Multiple values can be returned as an array:

```
func()
{
    return { a, b, c };
}
```

which can then be assigned as follows:

```
[x, y, z] = func();
```

2.9.5 Function declaration

A function can only be called when the compiler knows about it. In the program listed below [2.8], the `MyOls()` function can be used inside `main`, because the source code is already known at that stage. If `MyOls()` were to be moved below `main` it cannot be used any more: the compiler hasn't yet encountered `MyOls()`. However, there is a way to inform about the existence of `MyOls()`, without yet giving the source code, namely by declaring the function. This amounts to copying the header only, terminated with a semicolon. To illustrate the principle:

```
#include <oxstd.oxh>

MyOls(const mY, const mX); // forward declaration of MyOls,
                           // so that it can be used in main

main()
{
    // now MyOls may be used here
}

MyOls(const mY, const mX)
{
    // code of MyOls
}
```

The header files (e.g. `oxstd.oxh`) mainly list all the function declarations together, whereas the source code resides elsewhere.

An option for small bits of code is to write the function to an `.ox` file, and just include the whole file into the source file which needs it.

- [2.9] Add documentation to `MyOls`, using the template provided in §2.2. Save the resulting code (comment plus `MyOls`) in a file called `myols.ox`. Then adjust your program resulting from [2.8] along these lines:

```
#include <oxstd.oxh>
#include "myols.ox" // insert code from myols.ox file

main()
{
    // now MyOls may be used here
}
```

2.9.6 Importing code

A better approach is to import code. The advantage is that the same code can be imported multiple times, in contrast to multiple includes which causes duplication.

For the previous example, create a header file `myols.oxh` in the same folder as `myols.ox`. This lists the exported functionality:

```
MyOls(const mY, const mX);
```

Then to use it:

```
#include <oxstd.oxh>
#import "myols" // no extension here

main()
{
    // now MyOls may be used here
}
```

2.9.7 Returning values in an argument

Often, a function needs to return more than one value. Multiple returns, §2.9.4, are the most convenient mechanism.

But we also saw that `olsc` returned a function in an argument. This is through a *reference* to a variable, which uses the ampersand (&) prefix. The following program illustrates the principle.

```
#include <oxstd.oxh> oxintro2g>oxrun.dev

test1(x) // no const, because x will be changed
{
    x = 1;
    println("in test1: x=", x);
}
test2(const ax)
{
    // Note: indexing starts at 0 in 0x
    ax[0] = 2;
    println("in test2: x=", ax[0]);
}
main()
{
    decl x = 10;

    println("x = ", x);
    test1(x); // pass x
    println("x = ", x);
    test2(&x); // pass reference to x
    println("x = ", x);
}
```

The program prints:

```
x = 10
in test1: x=1
x = 10
in test2: x=2
x = 2
```

This is happening:

- When calling `test2`, it receives in `&x` the *reference* to the variable `x`, not its contents. In other words, we have posted the address of `x`, rather than `x` itself.
- Inside `test2`, the `ax` argument holds this reference. To access the contents at that address, we use subscript 0: `ax[0]` is the contents of the address, which we can now change.
- `ax[0] = 2` does precisely that: it changes `x` itself, because `x` resides at that address.

Consider the variable as a mailbox: a location at which a value can be stored. In the first case (`test1`), we just send the content of the box: the function can read or change the content, but we (the function caller) still have the original version. In the second case (`test2`), we pass the key to the mailbox (the 'address'): this allows the function to put something new in the box, which will then permanently replace the content once the function returns. Whether the variable is passed *by value* as in `test1`, or *by reference* as in `test2` is determined by the author of the function. The function user must follow the conventions adopted by the function author.

Finally, `Ox` makes no distinction between functions which do return a value, and those that do not. If you wish, you may ignore the return value of a function altogether. (But, of course, if a function has no return value, it should not be used in an expression.)

For example:

```
decl b0 = MyOls(my, mx)[0];
MyOls(my, mx);
print(MyOls(my, mx));
```

The first line directly indexes the returned vector. The syntax of indexing is discussed in the next chapter.

►[2.10] Modify `MyOls` to print the following information:

```
Number of observations: xx
Coefficients:
  xx
  xx
Error variance:
  xx
```

►[2.11] Modify `MyOls` to compute the estimated error variance. Return this using multiple returns.

Chapter 3

Operators

3.1 Introduction

A language like Ox needs at least three kinds of operators to work with matrices:

1. index operators, to access elements in a matrix;
2. matrix operators, for standard matrix operations such as matrix multiplication;
3. dot operators, for element by element operations.

There are quite a few additional operators, for example to work with logical expressions – these are discussed later in this chapter.

3.2 Index operators

In §2.8 we learned various ways to create a matrix. The counterpart is the extraction of single elements or specific rows or columns from the matrix. Ox has a flexible indexing syntax to achieve this. But first:

Indexing in Ox starts at zero, not at one!

Initially you might forget this and make a few mistakes, but before too long it will become second nature. Ox has adopted this convention for compatibility with most modern languages, and because it leads to faster programs. The available indexing options are:

- Single element indexing

A matrix usually has two indices: `[i] [j]` indexes element (i, j) of a matrix, where `[0] [0]` is the first (top left) element.

- Range indexing

Either `i` or `j` may be replaced by a range, such as `i1:i2`. If the lower value of a range is missing, zero is assumed; if the upper value is missing, the upper bound is assumed.

- Empty index
The empty index `[]` selects all rows (when it is the first index) or all columns (when it is the second). When there is only one index `[]` the result is a column vector, filled by taking the elements from the index and row by row.
- `.last` element
The last element `[.last]` can be used for convenience, where, e.g., `m[.last]` is the same as `m[sizer(m)-1]`.
The penultimate element is `[.last-1]`.
- Indexing a vector (i.e. a matrix with one row or one column)
When a matrix is used with one index, it is treated as a vector. In that case it does not matter whether the vector is a row or a column vector.
- Using a matrix as an index
In this case the matrix specifies which rows (if it is the first index) or columns (for the second index) to select. The elements in the indexing matrix must be integers (if not, they are truncated to integers by removing the fractional part).
Here are some examples:

$$x = \begin{pmatrix} 0 & 1 & 2 \\ 3 & 4 & 5 \end{pmatrix}, \quad y = (0 \quad 1 \quad 2), \quad z = \begin{pmatrix} 0 \\ 3 \\ 6 \end{pmatrix}.$$

$$x[0][0] = 0, \quad x[][1:] = \begin{pmatrix} 1 & 2 \\ 4 & 5 \end{pmatrix}, \quad x[1][y] = (3 \quad 4 \quad 5),$$

$$y[:1] = y[0][:1] = (0 \quad 1), \quad z[:1] = z[:1][0] = \begin{pmatrix} 0 \\ 3 \end{pmatrix}.$$

- [3.1] Write a program to verify these examples.
- [3.2] Write a program which creates a 4×4 matrix of random numbers. Then extract the 2×2 leading submatrix using (a) range indexing, and (b) matrix indexing.

3.3 Matrix operators

All operators `+` `-` `*` `/` work as expected when both operands are an integer or a double: when both operands are an integer, the result is an integer, otherwise it will be a double. The exception is division of two integers: this will produce a double, so $1/2$ equals 0.5 (C and C++ programmers take note!).

When matrices are involved, things get more interesting. Obviously, when two matrices have the same size we can add them element by element (`+`), or subtract them element by element (`-`). Although not a standard matrix algebraic operation, adding a column vector to a row vector works is allowed in Ox (and at times very useful). It works like a table:

$$\begin{pmatrix} x_0 & x_1 \end{pmatrix} + \begin{pmatrix} y_0 \\ y_1 \\ y_2 \end{pmatrix} = \begin{pmatrix} x_0 + y_0 & x_1 + y_0 \\ x_0 + y_1 & x_1 + y_1 \\ x_0 + y_2 & x_1 + y_2 \end{pmatrix}.$$

For matrix multiplication use `*`, then element i, j of the result is the inner product of row i (left operand) and column j (right operand).

►[3.3] If you're not so familiar with matrices, try the following on paper and then in Ox:

$$\begin{pmatrix} 1 & 2 \\ 3 & 4 \end{pmatrix} \times \begin{pmatrix} 2 & 1 \\ 1 & 2 \end{pmatrix}.$$

Division (`/`), when the right operand is a matrix, corresponds to post multiplication with the inverse. We've already used matrix transpose (`'`) and horizontal and vertical concatenation. We also saw one useful feature when creating the constant term for regression: when concatenating an integer (or double) and a matrix, the scalar is automatically replicated to get the same number of rows (`~`) or columns (`|`). When concatenating two non-matching matrices, the shortest one is padded with zeros at the end. (So there is a difference between `1 ~ <1;1>` and `<1> ~ <1;1>`; a warning is printed for the latter.)

A square matrix may be raised to an integer power, using `^`, for example `A^2` equals `A*A`. To summarize:

operator	operation
<code>'</code>	transpose, $X'y$ is short for $X' * y$
<code>~</code>	(matrix) power
<code>*</code>	(matrix) multiplication
<code>/</code>	(matrix) division
<code>+</code>	addition
<code>-</code>	subtraction
<code>~</code>	horizontal concatenation
<code> </code>	vertical concatenation

Some operations are illegal, resulting in an error message. Here is an example:

```
Runtime error: 'matrix[4][1] * matrix[3][4]' bad operand
Runtime error occurred in main(16), call trace:
C:\Program Files\Ox\tutorial\oxintro3a.ox (16): main
```

The first says that we cannot multiply a 4×1 matrix into a 3×4 matrix. The error occurred in the `main` function, at line 16. In OxEdit or OxMetrics you can Ctrl+click (Command+click for macOS) on the line with the error to jump directly to the problematic code.

►[3.4] Write a program that creates the following two matrices:

name	dimensions	content
x	3×4	random numbers
y	4×1	(1, 2, 3, 4)

Then compute the following: $y'y$, xy , $y'x'$, $(x|y')^2$, $y+y'$, $x'+y$. Also check if these work: yx , $x'y$, $x+y$.

►[3.5] Consider a simple linear model:

$$y_t = \beta_0 + \beta_1 x_t + \epsilon_t, \quad \text{for } t = 1, \dots, T.$$

Creating a vector $\mathbf{x}_t = (1 \ x_t)'$ and $\beta = (\beta_0 \ \beta_1)'$:

$$y_t = \mathbf{x}_t' \beta + \epsilon_t, \quad \text{for } t = 1, \dots, T.$$

More compact notation stacks the y_t underneath each other to create the $T \times 1$ matrix Y , and the transposed \mathbf{x}_t to create the $T \times 2$ matrix X :

$$Y = X\beta + \epsilon.$$

This format is closest to the matrix expressions used in Ox.

Complete the following code section and turn it into a working Ox program. The program generates data from the simple linear model just discussed.

```

/* complete this simple linear model */
decl ct, mx, vbeta, veps, vy;
ct = 4; // sample size T
mx = ... // create X, where x_t = t
vbeta = ... // 2 x 1 matrix with ones
veps = 0.1 * rann(ct, 1);
vy = ... // create Y
print("y = X * beta + eps\n",
      "X", mx, "beta", vbeta, "eps", veps, "y", vy,
      "b_hat", (1/(mx'mx)) * (mx'vy) );
oxintro3b>oxrun.dev

```

Your code should produce the following output:

```

y = X * beta + eps
X
      1.0000      1.0000
      1.0000      2.0000
      1.0000      3.0000
      1.0000      4.0000

beta
      1.0000
      1.0000

eps
      0.022489
      0.17400
     -0.020426
     -0.091760

y
      2.0225
      3.1740
      3.9796
      4.9082

b_hat
      1.1554
      0.94628

```

►[3.6] Extend the previous example by adding the following code:

```

print("b_hat", invert(mx'mx) * (mx'vy) );
print("b_hat", (mx'mx)^-1 * (mx'vy) );
print("b_hat", invertsym(mx'mx) * (mx'vy) );
decl vb_hat;
olsc(vy, mx, &vb_hat); // olsc is the best way to do OLS!
print("b_hat", vb_hat);

```

3.4 Dot operators

Dot operators are element-by-element operators. For adding and subtracting matrices there is only the dot version, already used in the previous section (written as + and -).

Element-by-element multiplication is denoted by `.*` and `./` is used for element-by-element division. As with addition and subtraction, dot conformity implies that either operand may be a row (or column) vector. This is then swept through the rows (columns) of the other operand. For example:

$$\begin{pmatrix} x_0 & x_1 \end{pmatrix} .* \begin{pmatrix} y_0 & y_1 \\ y_2 & y_3 \\ y_4 & y_5 \end{pmatrix} = \begin{pmatrix} x_0y_0 & x_1y_1 \\ x_0y_2 & x_1y_3 \\ x_0y_4 & x_1y_5 \end{pmatrix}.$$

To summarize:

operator	operation
<code>.^</code>	element-by-element power
<code>.*</code>	element-by-element multiplication
<code>./</code>	element-by-element division
<code>+</code>	addition
<code>-</code>	subtraction

- [3.7] Extend the program from [3.4] with the following expressions: `y.*y`, `y.*y'`, `x.*x`, `y.^2`.

3.5 Relational and equality operators

Relational operators compare both operands, and exist in matrix version and in element by element (or 'dot') version. The first version always returns an integer, even when both arguments are matrices. The return value 0 stands for FALSE, and 1 for TRUE. When comparing a matrix to a scalar, the result is only 1 (TRUE) if it holds for each element of the matrix.

operator	operation
<code><</code>	less than
<code>></code>	greater than
<code><=</code>	less than or equal to
<code>=></code>	equal or greater than
<code>==</code>	is equal
<code>!=</code>	is not equal

The second form of relational operator is the dotted version: this does an element by element comparison, and returns a *matrix* of 0's and 1's. The dotted versions are:

operator	operation
.<	element-by-element less than
.>	element-by-element greater than
.<=	element-by-element less than or equal to
.>=	element-by-element equal or greater than
==	element-by-element is equal
!=	element-by-element is not equal

Often code is more readable when using the predefined constant `TRUE` and `FALSE`, instead of the numbers 1 and 0. These are defined in `oxstd.oxh`. Relational operators are especially important in conditional expressions and loops, and these are discussed in the next chapter.

3.6 Logical operators

These are closely related to the relational operators, and also have non-dotted and dotted versions. The first evaluate to either zero or one:

operator	operation
&&	logical-and
	logical-or

If an expression involves several logical operators after each other, evaluation will stop as soon as the final result is known. For example in `(1 || checkval(x))` the function `checkval` is never called, because the result will be true regardless of its outcome. This is called a *boolean shortcut*.

The dotted versions perform the logical expression for each element when matrices are involved (therefore they cannot have boolean shortcuts):

operator	operation
.&&	element-by-element logical-and
.	element-by-element logical-or

As a first example, we print a logical table. Print format options are used to label rows and columns, for more information see §7.1.

```

oxintro3d>oxrun.dev
#include <oxstd.oxh>

main()
{
    decl a1 = <0,1>, a2 = <0,1>;

    print("Truth table", "%7g  ",
          "%r", {"m=0:", "m=1:"},
          "%c", {" m || 0", " m || 1", " m && 0", " m && 1"},
          (a1' .|| a2) ~ (a1' .&& a2) );
}

```

Which prints the table:

```
Truth table
  m || 0   m || 1   m && 0   m && 1
m=0:   0     1     0     0
m=1:   1     1     0     1
```

The next program uses some matrix comparisons, printing:

```
v ~ (v .> 1 .&& v .< 3) ~ (v .== <1:3>')
1.0000    0.00000    1.0000
2.0000    1.0000    1.0000
3.0000    0.00000    1.0000
```

No dots: (v > 1 && v < 3) = 0, (v == <1:3>') = 1

```
#include <oxstd.oxh> oxintro3e>oxrun.dev

main()
{
  decl v = <1;2;3>;

  print("      v ~ (v .> 1 .&& v .< 3) ~ (v .== <1:3>')",
        v ~ (v .> 1 .&& v .< 3) ~ (v .== <1:3>'));
  println("No dots: ",
          "(v > 1 && v < 3) = ", (v > 1 && v < 3),
          ", (v == <1:3>') = ", v == <1:3>');
}
```

Some procedures are available for selecting or dropping rows/columns based on a logical decision. These are `selectifr`, `selectifc`, `deleteifr` and `deleteifc`; `vecindex` may be used to translate the 0-1's to indices. A very useful, but slightly more complex operator is the dot-conditional operator (see §3.8).

Here are some examples using these functions:

expression	outcome
u	1 0 1 0 2
u .> 0	1 0 1 0 1
vecindex(u)'	0 2 4
vecindex(u .> 1)'	4
selectifc(u, u .> 0)	1 1 2
selectifc(u, u .> 1)	2

3.7 Assignment operators

It may surprise you, but assignment is an operator like any other, it just has very low precedence (only one operator is below it: the comma operator). As a result we may write

```
decl x1, x2, x3, x4;
x1 = 0; x2 = 0; x3 = 0; x4 = 0;
// or more concisely:
x1 = x2 = x3 = x4 = 0;
```

There are also compact assignment-and-other-operation-in-one operators, for example you could try adding print statements for:

```
decl x1, x2, x3, x4;
x1 = x2 = x3 = x4 = 0;

x1 += 2;
x2 -= x1;
x1 *= 4;
x1 /= 4;
x1 ^= x2;
x3 |= 2;
```

3.8 Conditional operators

Both the conditional, and dot-conditional operators are a bit more advanced, because they have three components. The dot-conditional can be especially useful, because it is like a filter: a one in the filter will let the first value through, a zero the second. Consider for example:

```
decl x = rann(2,2);
x = x .< 0 .? 0 .: x;
```

Initially, `x` is a matrix with standard normal random numbers. The next line checks for negative elements (`x .< 0` creates a 0-1 matrix, with 1 in the positions of negative numbers). For all positions where the filter is not 0, the expression after the `.?` is used. For the zeros, the else expression (after `.:`) is applied.

►[3.8] Below is an example using the `selectifr` and `vecindex` functions. Adjust it to use the dot-conditional operator (use the help if necessary, see under conditional operator), to set all negative values of `u` to zero. Note that dot operators tend to be much faster than using loops.

```
#include <oxstd.oxh> oxintro3f>oxrun.dev

main()
{
    decl u = rann(6,1), v, w;

    v = selectifr(u, u .< 0)';
    print(u', v');

    w = u;
    w[vecindex(u .< 0)][] = 0;
    print(u ~ w, v' ~ vecindex(u .< 0));
}
```

3.9 And more operators

We have not discussed all operators, see the Ox book for the full list. Some will be needed in the remaining chapters:

```
decl x1, x2;
x1 = x2 = 0;

print(x1, " ", ++x1, "\n");           // increment x1 by 1
print(x1, " ", --x1, "\n");           // decrement x1 by 1
x1 = <0,1,2>;
println(x1, " ", !x1, " ", !!x1);     // ! is negation:
                                       // 0 becomes 1, non-zero becomes 0
```

3.10 Operator precedence

Because operator precedence is so important, we replicate the table from the Ox book here. Table 3.1 gives a summary of the operators available in Ox, together with their precedence. The precedence is in decreasing order. Operators on the same line have the same precedence, in which case the associativity gives the order of the operators.

Table 3.1 Ox operator precedence

Category	operators	associativity
primary	() :: [] {}	left to right
postfix	-> . () [] ++ -- '	left to right
power	^ .^	left to right
unary	++ -- + - ! new delete	right to left
multiplicative	** * .* / ./	left to right
additive	+ -	left to right
horizontal concatenation	~	left to right
vertical concatenation		left to right
relational	< > <= >= .< .> .<= .>=	left to right
equality	== != .== .!=	left to right
logical dot-and	.&&	left to right
logical-and	&&	left to right
logical dot-or	.	left to right
logical-or	??	left to right
conditional	? : .? .:	right to left
assignment	= *= /= += -= ~= = .*= ./=	right to left
comma	,	left to right

At first, it will be useful to keep Table 3.1 close at hand: we often use the precedence ordering in our statements to avoid using too many parentheses. But when in doubt, or when needing to override the default, you can always add parenthesis. For example, in [2.8] we wrote:

```
mx = 1 ~ x1 ~ x1 .^ 2; // regressors
```

Using the precedence table we know that dot-power comes before concatenation. Also, concatenation is evaluated left to right. So the expression is evaluated as:

```
mx = ((1 ~ x1) ~ (x1 .^ 2));
```

Writing

```
mx = (1 ~ x1 ~ x1) .^ 2;
```

would have given some problems in the regression.

Chapter 4

Input and Output

4.1 Introduction

Table 4.1 lists the main files types which Ox can read and write.

<i>file type</i>	<i>default extension</i>
Text matrix file	.mat
Ox/PcGive/OxMetrics data file	.oxdata
Ox/PcGive/OxMetrics data file (old)	.in7 (with .bn7)
Excel spreadsheet file	.xlsx
CSV spreadsheet file	.csv
Zipped CSV spreadsheet file	.csv.zip
Text file using <code>fscan/fprint</code> functions	
Binary file using <code>fread/fwrite</code> functions	

Table 4.1 Supported file formats

Simple functions are available for reading and writing, as are low level functions which can be used to read virtually any binary data file (provided the format is known; see the examples in `ox/samples/inout`). This chapter gives examples of the most frequently used methods, but is by no means exhaustive.

To read a file directly into a matrix, use `loadmat`. The `loadmat` function uses the extension of the file name to determine the file type. Use `savemat` to write a matrix to disk, again the file type is determined by the extension.

All versions of Ox, whether for Linux, macOS, or Windows, will write identical files.

4.2 Using paths in Ox

Linux and macOS use forward slashes in folder names (e.g. `ox/samples/myfirst.ox`); Windows uses backward slashes (e.g. `ox\samples\myfirst.ox`).

In Ox you can use either, but note that backward slashes must be doubled in a string: `"ox\\samples\\myfirst.ox"`. Ox will interpret one backslash in a string as an escape sequence. For example, the newline character `"\n"` inserts a linebreak, see §7.4.

For simplicity, we always use forward slashes in our Ox code.

4.3 Using OxMetrics or Excel

If you need to enter data from the keyboard, you can enter these into a file using a text editor, or enter them into a OxMetrics database or Excel spreadsheet. These can be read directly into an Ox matrix or into an Ox database. Examples are given below.

4.4 Matrix file (.mat)

This is a simple ASCII (human-readable) file. The first two numbers in the file give the number of rows and columns of the matrix, this is followed by the matrix elements, row by row. If `data.mat` has the following contents:

```
4 2 // 4 by 2 matrix
1 2 // comment is allowed
3 4
5 6 7 8
```

then the following program will read it, provided it is in the same directory.

```
#include <oxstd.oxh>

main()
{
    decl mx = loadmat("data.mat");

    println(mx);
}
```

- [4.1] Rewrite [2.8] by putting the data in a `.mat` file. To save typing the numbers, you can first run the program with a `savemat` command.

4.5 Spreadsheet files

Ox can read and write the following spreadsheet files:

- Excel: `.xlsx` files;
- Comma separated: `.csv`, `.csv.zip` files;

provided the following convention is adopted:

- Ordered by observation (that is, variables are in columns).
- Columns with variables are labelled (have a name).
- There is an unlabelled column with the dates (as a string), in the form year–period (the – can actually be any single character), for example, 1980–1 (or: 1980Q1 1980P1 1980:1 etc.). This doesn't have to be the first column.
- The data form a contiguous sample (non-numeric fields are converted to missing values, so you can leave gaps for missing observations; or use the Excel code `#N/A`). Workbooks are compound files, and only the first sheet in the file is read.

For example, the format for writing is (this is also the optimal format for reading):

	A	B	C	D
1		CONS	INFL	DUM
2	1980-1	883	2.7	3
3	1980-2	884	3.5	5
4	1980-3	885	3.9	1
5	1980-4	889	2.6	9
6	1981-1	900	3.4	2

Ox can read a spreadsheet into an array using `loadsheets`, which can also be used to choose a specific sheet. The counterpart for saving is `savesheet`.

4.6 Ox/OxMetrics/PcGive data files (`oxdata`, `.in7/.bn7`)

The `oxdata` format is a concise and efficient format that is the current default for Ox.

The older `.in7/.bn7` can also be used, but has the disadvantage that the two files must always be kept together: when the `in7` name is given, the `bn7` with the same name must be found too. An `oxdata` file is actually the `.in7` and `.bn7` zipped together.

Because data are stored by variable, both these formats are faster than `xlsx` or `csv`.

As for spreadsheet and matrix files, these files can also be read directly into a matrix using the `loadmat` function.

- [4.2] Adjust the program you wrote in [4.1]. to save the matrix file in the PcGive file format. If you have access to OxMetrics, then load the file into it. Or, if you have access to Excel, you can try to use the spreadsheet format instead.

4.7 What about regressor names?

Often the columns of the matrix to be read in are variables for modelling which have a name. It would be nice to have those names in the output, or even select model variables (e.g. regressors) by name. This functionality is offered by the *database class*. We will start later with object oriented programming, but the following example could already be useful. The database class also has facilities to keep track of time-series data.

The examples will use the `data.oxdata` file, installed with Ox in the `ox/data` directory, as well as `OxMetrics10/data` in your documents.

```

oxintro4a>oxrun.dev
#include <oxstd.oxh>
#import <database>

main()
{
    decl dbase = new Database();
    dbase.Load("data/data.oxdata");
    dbase.Info();
}

```

This works, because if the data file is not in the current folder, Ox will search along its installation path. The output is:

```

---- Database information ----
Sample: 1953 (1) - 1992 (3) (159 observations)
Variables: 4

Variable  #obs #miss    min    mean    max  std.dev
CONS      159    0    853.5  875.94  896.83  13.497
INC       159    0    870.22  891.69  911.38  10.725
INFLAT    159    0   -0.6298  1.7997  6.4976  1.2862
OUTPUT    159    0   1165.9  1191.1  1213.3  10.974

```

- ▶[4.3] Try the above program.
- ▶[4.4] With `mx = dbase.GetAll();` you can get the whole database matrix into the variable `mx`. Use `meanc` etc. to replicate the database information.

4.8 Finding that file

It is usually inconvenient to specify the full path to a data file. Especially so with distributed code where it is up to the user to determine the file locations. Here is a solution that may help:

oxintro4b>oxrun.dev

```
#include <oxstd.oxh>
#import <database>
#import <data/>

main()
{
    decl x = loadmat("data/data.oxdata");
    print("means:", meanc(x));

    // This now works, because the data folder from ox is imported
    decl dbase = new Database();
    dbase.Load("data.oxdata");
    dbase.Info();
}
```

- loadmat works, because, when normal file opening fails, the file is searched along the installed ox folder. In this case, the file is in ox/data, so the second search succeeds.
- Load works with the help of the import statement. The argument to import is a partial path (because of the terminating slash). That relative path is now combined with the default paths to continue the search.

Chapter 5

Program Flow and Program Design

5.1 Introduction

Ox is a complete programming language, with `if` statements and `for` loops. However, where you need loops in more traditional languages, you can often use the special matrix statements available in Ox. Try to avoid loops whenever you can: the vectorized version will often be very much faster than using loops. On the other hand, you'll discover that loops cannot be avoided altogether: some code just doesn't vectorize (or the resulting code might get too complex to maintain).

5.2 `for` loops

The authors of the C language came up with a nice solution for the syntax of the `for` loop: it is flexible, yet readable:

```
for ( initialization ; condition ; incrementation )
{
    statements
}
```

For example:

```
decl i;
for (i = 0; i < 4; ++i)
{
    print(" ", i);
}
```

Printing: 0 1 2 3.

It works as follows:

	value of i	check condition	action
initialize i	0	TRUE → go on	print 0
increment i	1	TRUE → go on	print 1
increment i	2	TRUE → go on	print 2
increment i	3	TRUE → go on	print 3
increment i	4	FALSE → stop!	

So, at the end of the loop, `i` will have the value 4. Since the condition is checked prior to executing the loop, it is possible that the body is not executed at all (then `i` will have the initial value).

It is allowed to have more than one statement in the initialization or incrementation part of the for loop. A comma is then required as a separator:

```
for (decl i = 0, j = -1; i < 4 && j <= 3; ++i, j += 2)
{
    print(" ", i, " ", j);
}
```

One difference between this for loop and the previous is the location of the `decl` statement. In the first, it is before `for`, and the value of `i` is available afterwards. In the second it is local to the loop, and `i` and `j` do not exist anymore after the loop.

►[5.1] Write a function which multiplies two matrices using for loops. Compare the results with using the matrix multiplication operator.

►[5.2] Can you see what is wrong with this code?

```
for (i = 4; i >= 0; ++i)
{
    print(" ", i);
}
```

5.3 while loops

The first example for the for loop can also be written using a while loop:

```
i = 0;
while (i < 4)
{
    print(" ", i);
    ++i;
}
```

In this case, the for loop is more readable. But if there is not a clear initialization or incrementation part, the while form might be preferred.

Again, the while loop is not executed at all when `i` starts at 4 or above. If a loop must be executed at least once, use the do while loop:

```
i = 0;
do
{
    print(" ", i);
    ++i;
} while (i < 4);
```

Here the check is at the end: the body is executed the first time, regardless of the initial value of *i*.

5.4 break and continue

Two special commands are available inside loops:

- `break`;

Terminates the loop in which the command appears, for example:

```
for (i = 0; i < 4; ++i)
{
    if (i == 2) break;
    print(" ", i);
}
```

This works as follows:

	i	check condition	action
initialize i	0	TRUE → go on	no break, print 0
increment i	1	TRUE → go on	no break, print 1
increment i	2	TRUE → go on	break!

- `continue`;

Starts with the next iteration of the loop, for example:

```
for (i = 0; i < 4; ++i)
{
    if (i == 2) continue;
    print(" ", i);
}
```

This works as follows:

	i	check condition	action
initialize i	0	TRUE → go on	no continue, print 0
increment i	1	TRUE → go on	no continue, print 1
increment i	2	TRUE → go on	continue!
increment i	3	TRUE → go on	no continue, print 3
increment i	4	FALSE → stop!	

5.5 foreach loops

The `foreach` loop is a convenient way to loop over the elements of an array or matrix, without the need to ‘count’ the number of elements. For an array of strings we can

write:

```
#include <oxstd.oxh>
main()
{
    decl as = {"AA", "BB"};

    foreach (decl s in as)
    {
        println(">", s);
    }
}
```

A matrix can be indexed by element, by row, or by column:

```
#include <oxstd.oxh> oxintro5b>oxrun.dev
main()
{
    decl mx = <1,2;3,4>;

    foreach (decl xi in mx[i][j])
    {
        println("element ", i, ", ", j, ": ", xi);
    }
    foreach (decl xi in mx[i][[]])
    {
        println("row ", i, ": ", xi);
    }
    foreach (decl xi in mx[[]][j])
    {
        println("column ", j, ": ", xi);
    }
}
```

5.6 parallel for loops

Loops can be made parallel, simply by sticking the word `parallel` in front of `for` or `foreach`. The most important requirement is that loops can be executed in a random order. So a computation inside an iteration should not depend on a result from a previous one. Also, storing results should be to a precreated array or matrix: concatenating to a matrix outside the loop will fail. There are some restrictions on the loop iterators as well, see the Ox book, which also discusses the `serial` keyword.

Monte Carlo experiments are prime candidates for parallelization. An example is given in §11.8.4.

5.7 Conditional statements

In the previous section we used `if` statements to illustrate the use of `continue` and `break`. The full syntax is:

```

if ( condition )
{
    statements
}
else if ( condition )
{
    statements
}
else
{
    statements
}

```

here, condition must be an expression. Remember that any non-zero value is true, and zero is FALSE. Also: a matrix is only true if it has no zero elements at all. It might seem a bit pedantic to write true in lower case, and FALSE in uppercase (and a different font). There is, however, a big difference here between true and TRUE. The latter is a predefined constant which always has the value 1 (equal to !FALSE). The former refers to any non-zero value, e.g. 1, 2, -12.5, etc.

5.8 Vectorization

The following program draws T (set in the variable ct) normally distributed random numbers, and computes the mean of the positive numbers:

```

#include <oxstd.oxh> oxintro5b>oxrun.dev

main()
{
    decl ct, mx, i, cpos, dsum, time;

    ct = 250;
    mx = rann(ct, 1);
    time = timer();    // save starting time

    for (i = cpos = 0, dsum = 0.0; i < ct; ++i)
    {
        if (mx[i] > 0)
        {
            dsum += mx[i];
            ++cpos;
        }
    }
    println("lapsed time: ", timespan(time));
    println("count of pos.nos: ", cpos, " out of ", ct);
    println("mean of pos.nos: ", dsum / cpos);
}

```

- ▶[5.3] In exercise [3.8], we used the `selectifr` function to select part of a matrix, based on a boolean condition. Use this knowledge to rewrite the program without using loops or conditional statements.
- ▶[5.4] Repeat both programs for $T = 2000, 8000$ and compare the time of the original and your vectorized program. (You might have to increase T further to get meaningful timings.)

5.9 Functions as arguments

A function may be passed as argument to another function, and then called from within that function. To pass a function as argument, just pass the name (without parentheses). The argument is then used as any other function, but there can be no argument checking at compile time, only at run time.

The examples in this section involve maximization of a function of several parameters. Fortunately, maximization code is provided with Ox, and we shall use that to illustrate using functions as arguments. The library function `MaxBFGS` implements the BFGS (Broyden-Fletcher-Goldfarb-Shanno) method (other available unconstrained maximization methods are Newton's method and the Nelder-Mead simplex method. Further information on all these functions is in the Ox manual and online help. Details of the procedures are beyond our current objectives, but there is a vast literature on non-linear optimization techniques to consult (see, among many others, [Fletcher, 1987](#), [Gill, Murray, and Wright, 1981](#), [Cramer, 1986](#) and [Press, Flannery, Teukolsky, and Vetterling, 1988](#)). Note that many texts on optimization focus on minimization, rather than maximization, but of course that is just a matter of reversing the sign.

Consider minimizing the so-called Rosenbrock function:

$$f(\alpha, \beta) = 100 * (\beta - \alpha^2)^2 + (1 - \alpha)^2.$$

The minimum is at $(1, 1)$ with function value 0; the contours of the function are rather banana-shaped.

In order to use a function for maximization, it must have four arguments:

```
func(const vP, const adFunc, const avScore, const amHess);
```

obeying the following rules:

- `vP` is a $p \times 1$ matrix of parameter values at which the function is to be evaluated.
- `adFunc` must be the address of a variable on input. On output, the function value at the supplied parameters should be stored at the address.
- `avScore` holds either 0 on input, or the address of the score variable. If it was not 0 on input, the first derivatives of the function (the scores, a $p \times 1$ vector) should be stored at the address.
- We ignore the `amHess` argument.
- `func` should return 1 if it was successful, and 0 if it failed to evaluate the function at the supplied parameter values.

The initial program is:

```

oxintro5c>oxrun.dev
#include <oxstd.oxh>

fRosenbrock(const vP, const adFunc, const avScore,
            const amHess)
{
    adFunc[0] = -100 * (vP[1] - vP[0] .^ 2) .^ 2
                - (1 - vP[0]) .^ 2;           // function value

    return 1;                               // 1 indicates success
}

main()
{
    decl vp, dfunc, ir;

    vp = zeros(2, 1);                       // starting values
    ir = fRosenbrock(vp, &dfunc, 0, 0);      // evaluate

    println("function value is ", dfunc,
            "\n at parameter value:", vp');
}

```

- [5.5] Below is a function which can be used to test fRosenbrock. Add it to the previous program, rewriting main to use funceval, with fRosenbrock as the first argument.

```

oxintro5d
funceval(const func, const vP)
{
    decl dfunc, ir;

    ir = func(vP, &dfunc, 0, 0);           // evaluate
    if (ir == 0)
        println("function evaluation failed");
    else
        println("function value is ", dfunc,
                "\n at parameter value:", vP');
}

```

It is a small step from here to maximize the function using MaxBFGS. When calling MaxBFGS, a function has to be provided for maximization, in a format identical to that of fRosenbrock (which explains all the seemingly redundant arguments).

In addition to calling MaxBFGS (the help explains the arguments), the maximize.oxh header file must be included, and the object code for maximization linked in. The resulting program is:

```

                                                                    oxintro5e>oxrun.dev
#include <oxstd.oxh>
#import <maximize>

fRosenbrock(const vP, const adFunc, const avScore,
            const amHess)
{
    adFunc[0] = -100 * (vP[1] - vP[0] .^ 2) .^ 2
                - (1 - vP[0]) .^ 2;           // function value

return 1;                                       // 1 indicates success
}

main()
{
    decl vp, dfunc;

    vp = zeros(2, 1);                          // starting values

    MaxBFGS(fRosenbrock, &vp, &dfunc, 0, TRUE);

    println("function value is ", dfunc,
            " at parameter value:", vp');
}

```

- [5.6] Use the help or documentation to read about the MaxBFGS function. Add a call to MaxControl(-1, 1); to the program in order to print the results of each iteration. Also try to inspect the return value of MaxBFGS: function maximization can fail for various reasons (tip: use the MaxConvergenceMsg function).

5.10 Importing code

The previous program used the #import statement to link the maximization code:

```

#include <oxstd.oxh>
#import <maximize>

```

This was introduced in §2.9.6. There is no file extension in the argument to #import. The effect is as an #include <maximize.oxh> statement followed by marking maximize.oxo for linking (note that qn oxo file is a compiled ox file). If the .oxo is found, that is used, otherwise the .ox file.

The actual linking only happens when the file is run, and #import <maximize> statements may occur in other files which need it (including compiled files), provided it refers to the same code base.

The maximization code as supplied with Ox has three parts:

```

ox/include/maximize.oxh  the header file
ox/include/maximize.oxo  the compiled source code file
ox/src/maximize.ox      the original source code file

```

Program organization is discussed further in §5.12.

5.11 Global variables

A golden rule of programming is to *avoid global variables as much as possible*. The reason for this is that using global variables makes programs hard to maintain and difficult to use. A global variable (also called *external* variable) that is only used in one source file is not too bad, but it becomes more problematic as soon as the global variables have to be shared between various source code files.

Sometimes you cannot avoid the use of global variables. In that case we recommend to label them `static` whenever possible. This will indicate that the variable can only be seen within the current file (i.e. the *scope* is restricted to the file). For example, if a procedure like `fRosenbrock` above needs to access data, we cannot avoid a global variable: the data cannot be provided as an argument, because that will stop us from using the function as an argument to `MaxBFGS`.

Another solution to the problems caused by global variables is to wrap everything into a *class*. This is the subject of Chapter 8.

To illustrate the issue, we can estimate the parameters from a normal density given a sample of size n . The normal density is:

$$f(y_i; \mu, \sigma^2) = (2\pi\sigma^2)^{-1/2} \exp \left[- (y_i - \mu)^2 / 2\sigma^2 \right].$$

The log-likelihood (divided by n) for the sample is:

$$\ell(\theta|y)/n = \frac{1}{n} \sum_{i=1}^n \log f(y_i; \theta) = -\frac{1}{2} \log (2\pi\sigma^2) - \frac{1}{2n} \sum_{i=1}^n (y_i - \mu)^2 / \sigma^2.$$

Maximizing the log-likelihood amounts to regression on a constant term (but in regression the estimated variance is be divided by $n - k$). So, an explicit solution is available, and the code has only an illustrative purpose!

In the Ox program, the maximand is the log-likelihood divided by the sample size, instead of just the log-likelihood. The reason for this is the convergence decision by `MaxBFGS`. This is based on two criteria: relative change in parameters and likelihood elasticities (parameter times score). While both are invariant to scaling of parameters, the latter is not invariant to sample size. In least squares terminology this amounts to maximizing (minus) the residual variance, rather than the residual sum of squares.

- [5.7] The program `oxintro5e` creates a random sample of 50 observations with $\mu = 20$ and $\sigma^2 = 49$. Next, the values of μ and σ^2 are estimated for that particular sample, with the iterative process starting from the true values.

```

oxintro5f>oxrun.dev
#include <oxstd.oxh>
#include <oxfloat.oxh> // defines M_PI, M_2PI
#import <maximize>

static decl s_mY; // the data sample (T x 1)

fLoglik(const vP, const adFunc, const avScore, const amHess)
{
  decl dsum = sumsqrc(s_mY - vP[0]) / rows(s_mY);
  decl dsig2 = vP[1];

  adFunc[0] = -0.5 * (log(M_2PI * dsig2) + dsum / dsig2);

return 1; // 1 indicates success
}
main()
{
  decl cn = 50; // sample size
  decl dmU = 21; // distribution parameter: mean
  decl dsigma2 = 49; // and variance
  // generate a sample
  s_mY = dmU + sqrt(dsigma2) * rann(cn, 1);

  decl vtheta = <20;49>, dfunc;
  fLoglik(vtheta, &dfunc, 0, 0); // evaluate

  print("function value is ", cn * dfunc,
        " at parameter value:", vtheta');

  MaxControl(-1,5);
  MaxBFGS(fLoglik, &vtheta, &dfunc, 0, TRUE);

  println("Function value is ", cn * dfunc,
          " at parameter value:", vtheta');
}

```

Extend the program step by step:

1. Inside main use `loadmat` to load the data. `in7` file (see Chapter 4).
2. Replace the artificial y data by the first column from the loaded data (which is the `CONS` variable), and estimate μ .
3. Write $\mu = x_t \beta_0$ where $x_t = 1$. In the code, introduce an X variable which is set to a $n \times 1$ intercept. Use this variable in the log-likelihood and verify that $\hat{\mu}$ is unchanged.
4. Now extend the X matrix with the second and third columns from the loaded data. Adjust the coefficient vector accordingly, and update the log-likelihood function to estimate all parameters.
5. Finally, estimate $\log \sigma^2$ instead of σ^2 . This ensures that the estimated σ^2 will always be positive (because we have to take the exponent to transform it backwards). Adjust the starting value accordingly.

5.12 Program organization

To summarize program structure as seen up to this point:

- A header file communicates the declaration of functions, constants and external variables (§2.3).
- Importing Ox code makes it available for use (§5.10).
- Optionally, the Ox code can be precompiled into an oxo file.

For small programs it doesn't matter so much how you organize the code. It could be convenient to set some functionality aside in an .ox file (as for MyOls.ox), and then import it when required.

For large programs more care is needed. Usually, the project is divided in source code according to functionality (no need to create a separate file for each function). Header files then allow the declaration to be known wherever it is required. To run the program, the code must be linked in with the main function by importing the code.

As an example, pretend that the fLoglik function given above is actually of any use. First create a source code file called myloglik.ox:

```
#include <oxstd.oxh>
#include <oxfloat.oxh>

static decl s_mY;    // the data sample (T x 1)
// use static to avoid any other file from seeing s_mY

SetYdata(const mY)
{
    s_mY = mY;
}
FMyLoglik(const vP, const adFunc, const avScore,
          const amHess)
{
    // code deleted
}
```

By making s_mY static, we hide it from other source files: its scope is limited to this file only.¹ In order to store data in it, we provide the SetYdata function.

Next, a header file called myloglik.oxh (don't forget the semicolons after the declarations!):

```
SetYdata(const mY);
FMyLoglik(const vP, const adFunc, const avScore,
          const amHess);
// if s_mY is declared without static, then we would call
// it g_mY, and access from other files is provided by
// declaring it as follows in the header file:
// extern decl g_mY;
```

1. Including the code:

¹Although we recommend against it, if you wish to share it, remove the static keyword, and define it as external in the header file. In that case, we would use the g_ prefix instead of 'texttts...

```
#include <oxstd.oxh>
#import "myloglik"      // header and code

main()
{ // main code has to be supplied
}
```

Including the code this way can only happen once in a project.

The `#import "myloglik"` command corresponds to an `#include "myloglik.oxh"`, followed by marking `myloglik.ox` for linking. This way `myloglik.ox` will only be included once in a project, regardless of how many times `#import "myloglik"` occurs.

2. In case you wish to create the pre-compiled code, you could use Ox Compile from OxEdit's Run menu. Or from the command-line

```
oxl -c myloglik.ox
```

For Windows:

```
start /w/b oxl -c myloglik.ox
```

Note that you must recreate the `myloglik.oxo` file any time you make a change in `myloglik.ox`.

The filename for `#import` and `#include` was sometimes put inside double quotes, and other times in angular brackets. The former means that Ox will first try to find the file in the folder of the program. For files which are part of Ox this is not required, and the `<...>` form is used.

- [5.8] Add the `SetYdata` to the program from §5.11, and use it to change the contents of `m_sY`. Try the various procedures outlined above, and compare the outcomes.

5.13 Lambda functions

Now that we have a good understanding of program structure and global variables, we can create a more elegant solution of our maximization code. There are two ways to do this:

- Use a lambda function;
- Create a class that encapsulates the data as well as the log-likelihood.

Classes are introduced in Chapter 8. Here we will create a so-called lambda function, which is function declared inside another function.

Because a lambda function is locally declared, we use some special syntax to declare it:

```
decl a = 10.5;
decl myfunction = [=](arg)
{
    println("a+arg=", a + arg);
    return a + arg;
};
```

Some remarks:

- [=] makes myfunction a lambda function.
- Because it is a declaration statement, a ; is needed at the end.
- The lambda function can read (but not modify!) local variables within its scope.
- The lambda function ceases to exist when the enclosing function is exited.
- You cannot have a lambda function inside a lambda function.

This allows us to encapsulate the data within the function that is supplied to MaxBFGS, while maintaining the function signature that MaxBFGS imposes:

```

oxintro5g>oxrun.dev
#include <oxstd.oxh>
#include <oxfloat.oxh> // defines M_PI, M_2PI
#import <maximize>

NormalLoglik(const mY, const vP)
{
    decl dsum = sumsqrc(mY - vP[0]) / rows(mY);
    decl dsig2 = vP[1];
    decl f = -0.5 * (log(M_2PI * dsig2) + dsum / dsig2);
return f;
}
Estimate()
{
    decl cn = 50;           // sample size
    decl dmu = 21;         // distribution parameter: mean
    decl dsigma2 = 49;     // and variance
    decl my = dmu + sqrt(dsigma2) * rann(cn, 1);
    decl floglik = [=](vP, adFunc, avScore, amHessian)
        {
            adFunc[0] = NormalLoglik(my, vP);
            return 1;
        };

    decl vtheta = <20;49>, dfunc;
    floglik(vtheta, &dfunc, 0, 0); // evaluate

    print("function value is ", cn * dfunc,
          " at parameter value:", vtheta');

    MaxControl(-1,5);
    MaxBFGS(floglik, &vtheta, &dfunc, 0, TRUE);

    println("Function value is ", cn * dfunc,
            " at parameter value:", vtheta');
}
main()
{
    Estimate();
}

```

5.14 Style and Hungarian notation

The readability and maintainability of a program is considerably enhanced when using a consistent style and notation, together with proper indentation and documentation. You may have noticed that larger development projects often come with style guidelines. Applying this consistently in a projects makes it easier to understand the code for other programmers (which could be a past version of yourself!).

Style is a personal matter; this section describes the style adopted in the Ox manual. Indent by that Tab key or four spaces at the next level of control (i.e. after each opening brace), jumping back on the closing brace.

The Ox manual also uses something called Hungarian notation. This involves the decoration of variable names. There are two elements to Hungarian notation: prefixing of variable names to indicate type, and using case to indicate scope (remember that Ox is case sensitive).

In the following example, the `func1` function is only used in this file, and gets the address of a variable as argument. `Func2` is exported to other files, and expects a matrix `X`, and corresponding array of variable names (array of strings). The naming convention of the example uses most of:

variable	prefix	type
<code>mX</code>		matrix <code>X</code>
<code>asX</code>		array of strings <code>X</code>
<code>g_mX</code>	global	matrix <code>X</code>
<code>s_mX</code>	static	matrix <code>X</code>
<code>m_mX</code>	member of class	matrix <code>X</code>

while local variables are all lower case. We tend not to use Hungarian notation for local variables. While entirely optional, we have found it extremely useful to enhance the readability and maintainability of our code.

```
#include <oxstd.oxh>

const decl MX_R = 2;           /* a constant */
decl g_mX;                    /* exported matrix */
static decl s_iCount;        /* static external variable */

static func1(const amX) /*argument is address of variable */
{
    amX[0] = unit(2);
}
/* exported function */
Func2(const mX, const asX)
{
    decl i, m, cx = columns(mX), ct = rows(mX);
    if (cx != sizeof(asX))
        print("error: dimensions don't match");
}
```

Table 5.1 lists the conventions regarding the case of variables and functions, while Table 5.2 explains the prefixes in use.

Table 5.1 Hungarian notation, case sensitivity

local variables	all lowercase
function (not exported)	first letter lowercase
function (exported)	first letter uppercase
static external variable	s_ prefix, type in lower, next letter uppercase
exported external (global) variable	as above, but prefixed with g_
function argument	type in lowercase, next letter uppercase
constants	all uppercase

Table 5.2 Hungarian notation prefixes

prefix	type	example
i	integer	iX
c	count of	cX
b	boolean (f is also used)	bX
f	boolean (and integer flag)	fX
d	double	dX
m	matrix	mX
v	vector	vX
s	string	sX
a	array or reference (address)	aX
as	array of strings	asX
am	array of matrices	amX
p	pointer (function argument)	pX
m_	class member variable	m_mX
g_	external variable with global scope	g_mX
s_	static external variable (file scope)	s_mX

Chapter 6

Graphics

6.1 Introduction

Ox can create graphs in what are currently the main vector formats

1. pdf,
2. svg.

The browser version at oxrun.dev and OxEdit display svg files. However, the Ox program can also save a graph in pdf, which can then be exported to disk. OxMetrics also allows you to edit a graph, which can be saved in pdf or svg. When a graph is saved, Ox always saves the `gwg` file along. This contains all the required information about the graph to allow OxMetrics to reload it again later.

6.2 Example

```
#include <oxstd.oxh>
#include <oxdraw.oxh>

main()
{
    decl ct = 200, meps, msum;


    meps = rann(ct, 2);
    msum = cumulate(meps);

    DrawTMatrix(0, msum', {"y1", "y2"}, 1, 1, 1);
    DrawXMatrix(1, msum[] [0]', {"y1"}, msum[] [1]', "y2");

    ShowDrawWindow();
}
```

oxintro6a>oxrun.dev

The example program generates two drawings from a standard normal distribution, cumulates these to get two independent random walks. These are then drawn against time (both in one graph) and against each other, resulting in two graphs.

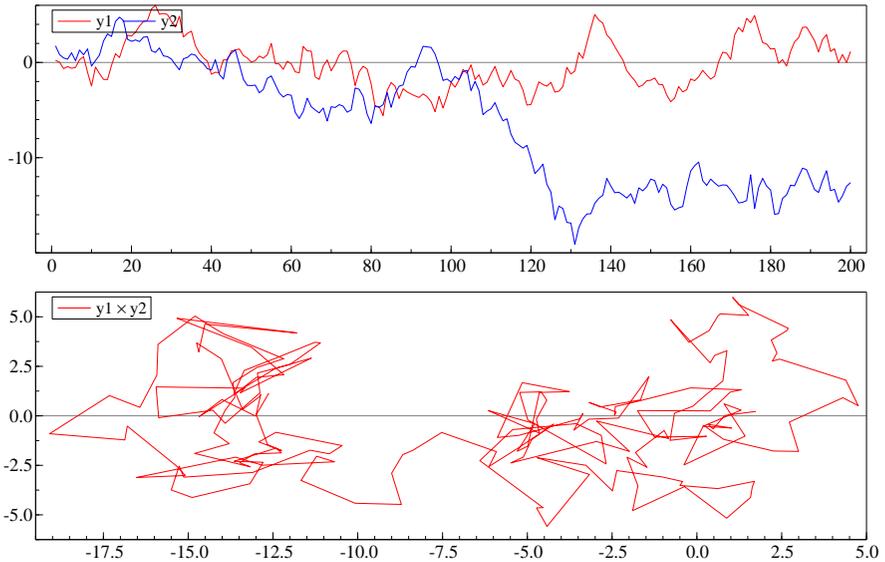

The `oxdraw.oxh` header file must be included for the graphics functions.

Some remarks on the functions used:

- `DrawTMatrix()` graphs variables against time. *It expects the data in rows.* The startyear(startperiod) is 1(1), with frequency 1. This gives an x -axis which is 1, 2, 3, The first argument is the area index, here 0 for the first plot.
 - `DrawXMatrix()` graphs variables against another variable. *It expects the data in rows.* The x -axis is given by the second variable. The first argument is the area index, here 1 for the second plot.
 - `ShowDrawWindow(filename)` is required to realize the graph on screen. It also clears the drawing buffer for subsequent graphs.
 - You may add a call to `SaveDrawWindow()` to save the graph to disk. The extension of *filename* determines the file type: `.pdf` Portable document format and `.svg` for Scaled vector graphics.
- [6.1] Extend the listed program with two plots. The additional graphs are the two standard normal drawings, and their cross plot.

Chapter 7

Strings, Arrays and Print Formats

7.1 Introduction

In addition to matrices (and integers and doubles), Ox also supports strings and arrays. We have been using strings all the time to clarify the program output. An example of a *string constant* is "some text". Once this string is assigned to a variable, that variable has the string type.

In §3.6 and §5.5 we even used an array of strings: {"0", "1"} and {"AA", "BB"}. This type is especially useful to label rows and/or columns of a matrix. Here is another example:

```
#include <oxstd.oxh> oxintro7a>oxrun.dev

main()
{
    print( "%i", {"row 1", "row 2"},
           "%c", {"col 1", "col 2"}, "%6.1g", unit(2) );
}
```

producing:

```
      col 1 col 2
row 1     1    0
row 2     0    1
```

This program has 7 string constants, and 2 arrays. The strings which have the % symbol are *format specifiers*, to be discussed later.

7.2 String operators

Most useful are string concatenation (~ but + will also work), and string indexing. Since a string is a one dimensional construct, it takes only one index. For example:

```

#include <oxstd.oxh>

main()
{
    decl s = "some";

    s ~= " text";
    println(s, s[4:], "\n size of s = ", sizeof(s));
}

```

7.3 The sprintf function

The `sprintf` function works exactly like `print`, but it returns the output as a string, instead of printing it to the screen. Together with concatenation, this allows for easy creation of text in the program.

In the next example we use `sprintf` to write intermediate results to a file, where the filename depends on the replication. This approach might be useful during very lengthy computations, to allow inspection of results before the program is complete.

```

#include <oxstd.oxh>
oxintro7b>oxrun.dev

main()
{
    decl crep = 4, ct = 50, i, sfile, mx;

    for (i = 0; i < crep; ++i)
    {
        mx = rann(ct, 1); // some lengthy calculation
        sfile = sprintf("step", i, ".mat");
        savemat(sfile, mx);
        print("Step ", i, " saved to \"", sfile,
              " \"; mean:", meanc(mx));
    }
}

```

- [7.1] Run the above program, then write a complementary program that reads the created files, computing the means of the data in those files.

7.4 Escape sequence

Escape sequences are special characters embedded in a string. They start with a backslash. The previous example used `\` to insert a double quote in a string. We also used `\n`, which inserts a newline character. Some useful ones are:

<code>\"</code>	double quote (")
<code>\0</code>	null character
<code>\\</code>	backslash (\)
<code>\a</code>	alert (bel)
<code>\b</code>	backspace
<code>\n</code>	newline
<code>\t</code>	horizontal tab

The most important is perhaps the backslash itself, because that is used in filenames: "c:\\ox\\bin". You may also use forward slashes in Ox, then only one is required: "c:/ox/bin".

7.5 Print formats

Without specifying an output format, all output is written in the default format. You can change both the global default output format, as well as specify a format for the next object in the `print` function.

Examples of the latter were in §7.1. There we used `"%6.1g"` to print the matrix in *general* format (which uses scientific notation if the numbers become too small or large), using an output field of 5 characters with 1 significant digit. In addition `"%r"` was used to indicate that the next argument is an array of strings to label the rows, whereas `"%c"` was used for column labels. A full description is in the online help, and in the manual.

The `format` function may be used to set the global format, for example:

```
format("%#13.5g"); // set new default format for doubles
format(200);      // increase line length to 200
```

`"%#13.5g"` is actually already the default for writing doubles such as matrix elements. The defaults will usually suffice, so perhaps it is more common to temporarily override it in the `print` function than using the `format` command.

►[7.2] Use the following program to experiment with some formats.

```
#include <oxstd.oxh> oxintro7c>oxrun.dev

main()
{
    decl mx;

    mx = ranu(1,1) ~ ranu(1,1) / 10000;
    print("%25.16g", mx, "%25.4g", mx, "%25.4f", mx);
}
```

7.6 scan

The counterpart of `print` is `scan`. But more commonly used are `fscan` to read from an open file, and `sscan` to read from a string.

If you need to save arrays or objects, and then read them again, then the `%v` format is useful. This saves a variable in one go, and allows it to be read as a whole again.

7.7 Arrays

A matrix is a two-dimensional array of real numbers, and cannot contain any other data types. Arrays give more flexibility. An array is a one-dimensional array of any object. Note that this is a recursive definition: an element in an array may be an array itself, making high dimensional arrays possible.

An array is constructed from variables by the use of curly braces, or by using the `new array[dim]` statement. When an array is printed, all elements are listed. Arrays can be concatenated, and indexed. Here is a more elaborate example which mixes types in an array:

```
#include <oxstd.oxh> oxintro7d>oxrun.dev

main()
{
    decl x = unit(2), ar;

    ar = {x, {"row 1", "row 2"}, {"col 1", "col 2"} };
    print(ar);

    ar = {x, { {"row 1", "row 2"}, {"col 1", "col 2"} } };
    println("Using the %v format:\n", "%v", ar);
}
```

producing:

```
[0] =
      1.0000      0.00000
      0.00000      1.0000

[1][0] = row 1
[1][1] = row 2
[2][0] = col 1
[2][1] = col 2
Using the %v format:
{<1,0;0,1>,{{"row 1","row 2"},{"col 1","col 2"}}}
```

7.7.1 Keyword arrays

A convenient recent addition is that of keyword arrays. This is not a new datatype, but essentially an agreement between Ox and you to interpret an array in a specific way:

If you index an array with a string, it will search all odd elements at that level.

If found, it returns the next value. Otherwise it will return `.null`.

The following program illustrates:

```
#include <oxstd.oxh> oxintro7e>oxrun.dev

main()
{
    decl arr = {"v1", 99, "v2", <1,2>};

    println("value at v1: ", arr["v1"]);
    println("value at v3: ", arr["v3"]);
    println("value at v3: ", arr["v3"] ?? <1;2>);
    arr ~ = {"v3", {"a", "b"}};
    println("value at v3: ", "%v", arr["v3"]);
}
```

Which prints:

```
value at v1: 99
value at v3: .Null
value at v3:
    1.0000
    2.0000
value at v3: {"a","b"}
```

The second `println` statement prints `.null` because the value does not exist. Then in the next line we use the nullity operator: if the value is `.null` or `.NaN`, the specified value is returned, otherwise the input value.

There is some ‘syntactic sugar’, used below to rewrite the program above:

```
#include <oxstd.oxh> oxintro7f>oxrun.dev

main()
{
    decl arr = {"v1": 99, "v2": <1,2>};

    println("value at v1: ", arr.v1);
    println("value at v3: ", arr.v3);
    println("value at v3: ", arr.v3 ?? <1;2>);
    arr.v3 = {"a", "b"};
    println("value at v3: ", "%v", arr.v3);
}
```

7.8 Missing values

There is one type of missing value which is supported by computer hardware. It is called *Not a Number*, or NaN for short.

In a matrix constant, you may use a dot to represent a NaN. You may also write `.NaN` whenever you need the missing value. The format used when printing output is `.NaN`. The spaces around the dot in the matrix constant are necessary, otherwise `.>` is interpreted as a dot-greater than:

```

oxintro7g>oxrun.dev
#include <oxstd.oxh>
#include <oxfloat.oxh> // defines M_NAN

main()
{
    decl m = < . >, d1 = .NaN;

    println(m + 1, d1 == .NaN, " ", d1 / 2);
}

```

Any computation involving a .NaN results in a .NaN, so in this example `d1 / 2` is also .NaN. Comparison is allowed, and `d1 == .NaN` evaluates to one (so is TRUE).

A number of procedures are available to deal with missing values, most importantly:

- `deletec()`: deletes all columns which have a NaN,
- `deleter()`: deletes all rows which have a NaN,
- `selectc()`: selects all columns which have a NaN,
- `selectr()`: selects all rows which have a NaN,
- `isdotnan()`: returns matrix of 0's and 1's: 1 if the element is a .NaN, 0 otherwise,
- `isnan()`: returns 1 if *any* element is a .NaN, 0 otherwise.

`isdotnan` in combination with the dot-conditional operator is an easy way to replace missing values by another value:

```

#include <oxstd.oxh>

main()
{
    decl m1 = <0,.,.,1>, m2;

    m2 = isdotnan(m1) .? -10 .: m1; // replace NaN by -10
    println(m1, m2);
}

```

In older code you may come across `M_NAN`, which is a constant evaluating to .NaN and defined in `oxfloat.oxh`.

7.9 Infinity

Infinity also exists as a special value supported by the hardware. Infinity can be positive or negative (printed as `+.Inf` and `-.Inf`), and can be used in comparisons as any normal number. The `isdotinf()` function tests for infinity.

- [7.3] Write a little program to experiment with NaN and infinity. Generate a NaN as the logarithm of a negative number, and infinity as the exponent of a large number. Investigate how they behave when multiplied/divided by each other or a normal number.

Chapter 8

Object-Oriented Programming

8.1 Introduction

Object-oriented programming might sound rather daunting at first. Indeed, in some computer languages, there is such a vast array of syntax features related to classes and objects, that it is almost impossible to master them all. Ox, however, only implements a small subset. As a consequence, there is a slight lack of flexibility. On the other hand, object-oriented programming in Ox is easy to learn. It may even be a useful as a start to using object-oriented aspects of other languages.

Object-oriented programming is an optional feature in Ox – up to now we’ve done quite well without it. So, is it worth the effort to learn it? We believe so: it avoids the pitfalls of global variables, and makes our code more flexible (allowing us, for example, to combine code sections more easily), and easier to maintain and share. We hope to have convinced you of this by the end of this book.

The main component of object-oriented programming is the *class*, and several useful classes are supplied with Ox. Examples are the *Database*, *Modelbase* and *Simulation* classes. Therefore we first focus on using existing classes, before learning how to write one.

8.2 Using object oriented code

The main vehicle of object-oriented programming is the *class*, which is the definition of an object (somewhat like the abstract concept of a car). For it to work in practice requires creating *objects* of that class (your own car is the object: it is difficult to drive around in an abstract concept). It is with these objects that the program works by making function calls to the object.

The first object-oriented code was encountered in §4.7. This was approximately as follows:

```

#include <oxstd.oxh>
#include <database>

DbTest()
{
    decl db = new Database();
    db.Load("data/data.oxdata");
    db.Info();
    delete db;
}
main()
{
    DbTest();
}

```

The main aspects for users of the Database *class* are:

- The code of the Database class must be linked in. This is achieved with the `#import` statement.
- Use `new` to create an *object* of the class.
The syntax

`object = new classname(...);`

involves a function call to the *constructor* function.

The *constructor* function is called when the object is created, and is used to do all necessary initializations. A constructor has the same name as the class, and may have arguments. In this case it creates an empty database.

- Make function calls to the created object.

`object.function(...)`

In this case we use `Load` to load the data, and `Info` to print some summary statistics.

- Use `delete` to remove the *object* from memory.

`delete classname;`

This involves a function call to the *destructor* function. In Ox this destructor often does nothing. After `delete`, we cannot use the object anymore.

Using `delete` is generally not needed, because Ox will tidy up when the object is not used anymore: here when `DbTest` is finished.

- [8.1] Had we used global variables to store the database information, then we could have only one database. The object-oriented code, on the other hand, allows us to create two databases, and use them simultaneously. Rewrite the previous example to create and load two databases, say `data/data.oxdata` and `data/finney.oxdata`. Print a summary for both before using `delete` to remove the objects.

8.3 Writing object-oriented code

Writing object-oriented code involves the following steps:

- declare a class with
- class members, consisting of:
 - constructor and destructor functions (optional),
 - functions and data members;
- write the contents of the function members.

These steps are contained in the following example:

```

#include <oxstd.oxh> oops1.ox>oxrun.dev

class AnnualSample
{
    AnnualSample(const iYear1, const iYear2); // constructor
    decl m_iYear1;
    decl m_iYear2;
};
AnnualSample::AnnualSample(const iYear1, const iYear2)
{
    m_iYear1 = iYear1;
    m_iYear2 = iYear2;
}

main()
{
    decl sam = new AnnualSample(1960, 2000);
}
```

- Declaring a class.

```
class classname
{
};
```

Inside the curly braces is a list of the member functions (the headers, just like in a header file), and the data members (declared using `decl`). Often, this section is in a separate header file, because it is required whenever the class is used.

- The code for member functions is always preceded by

```
classname::
```

so that it is clearly part of the named class. Apart from this prefix, the syntax for functions is unchanged.

The constructor function has the same name as the class.

Every member function can access the data members. When in use, each object works on its own copies of the data members. However, functions which are not of the class *cannot* access the data members.

- In this example the constructor has two arguments, which must be supplied when the object is created.

►[8.2] Add a data member called `m_cT` which is set to the sample size in the constructor function.

- [8.3] Add a function called `GetSampleSize` to this class, which returns the sample size. Add some output in `main` which prints the sample size of the created object.

Because these exercises may still be quite difficult at this stage, we provide the solution:

```

#include <oxstd.oxh> oops2.ox>oxrun.dev

class AnnualSample
{
    AnnualSample(const iYear1, const iYear2);           // constructor
    GetSampleSize();                                   // added function
    decl m_iYear1;
    decl m_iYear2;
    decl m_cT;                                         // added data member
};

AnnualSample::AnnualSample(const iYear1, const iYear2)
{
    m_iYear1 = iYear1;
    m_iYear2 = iYear2;
    m_cT = m_iYear2 - m_iYear1 + 1; // value set in constructor
}

AnnualSample::GetSampleSize()                        // only way to get the value
{                                                     // from outside
    return m_cT;
}

main()
{
    decl sam = new AnnualSample(1960, 2000);
    println("The sample size is: ", sam.GetSampleSize());
    delete sam;
}

```

- [8.4] Add a function called `YearIndex` to this class, which returns the observation index of the specified year. Add some code in `main` which uses this new function, for example to print the index of 1960.

8.4 Inheritance

As it stands, the `AnnualSample` class is not very useful. We can extend it by adding a data matrix and variable name. However, instead of adding those members, we create a new class which is derived from `AnnualSample`. The new class, `AnnualDb`, *inherits* all the members and functions of the *base class*; only the new bells and whistles need to be added.

oops3.ox>oxrun.dev

```

#include <oxstd.oxh>
class AnnualSample
{
    AnnualSample(const iYear1, const iYear2);
    decl m_iYear1;
    decl m_iYear2;
};
AnnualSample::AnnualSample(const iYear1, const iYear2)
{
    m_iYear1 = iYear1;
    m_iYear2 = iYear2;
}
class AnnualDb : AnnualSample // derived class
{
    AnnualDb(); // constructor
    ~AnnualDb(); // destructor
    Create(const mX, const asX, const iYear1, const iYear2);
    virtual Report();
    decl m_mX;
    decl m_asX;
};
AnnualDb::AnnualDb()
{
    AnnualSample(0, 0);
    m_mX = <>;
    m_asX = {};
}
AnnualDb::~AnnualDb()
{
    println("Destructor call: deleting object.");
}
AnnualDb::Create(const mX, const asX, const iYear1, const iYear2)
{
    m_mX = mX;
    m_asX = asX;
    AnnualSample(iYear1, iYear2);
    Report();
}
AnnualDb::Report()
{
    println("The sample size is: ", m_iYear2 - m_iYear1 + 1);
}
main()
{
    decl db = new AnnualDb();
    db.Create(rann(20,2), {"Var1", "Var2"}, 1981, 2000);
    delete db;
}

```

- The constructor of the derived class is responsible for calling the base constructor (C++ programmers take note!). Here the remaining data members are set to the empty matrix and empty array respectively.

- The `AnnualDb` class has a destructor function. A destructor has the same name as the class, but is prefixed with a `~`. In this case it does not do anything useful, just print a message.
- The database is not created in the constructor (this is a design choice),
- instead `Create` is used to create the database, and print a report. `Create` calls the base class constructor as a normal function call. We could have set `m_iYear1` and `m_iYear2` directly, because we can access the data members of the base class, but decided that the function call leads to more maintainable code.
- Function members in the derived class have direct access to data members (see, e.g. `Report`);
- `Report` is a **virtual** function. This means that when `Report` is called (as e.g. in `Create`), it will call the version in the derived class (if it exists). So a derived class can *override* the functionality of `Report`.

The class writer has decided to label the `Report` function as `virtual`. If we use an object of the `AnnualDb` class, and call `Create` the `AnnualDb::Report` function is called. However, when we create a derived class (inheriting *inter alia* `Create`) which has a new `Report`, then the new version is called in `AnnualDb::Create`, despite the fact that `AnnualDb::Create` knows nothing about the derived class

This covers the most important aspects of object-oriented programming. Further examples, making use of the classes which come with `Ox`, are given in Chapters 10 and 11. The examples in this chapter show some similarity to the `Database` class. You can check the source code in the `ox/src` folder and the header in `ox/include`.

- [8.5] Create a class which is derived from `AnnualDb`, and give it a `Report()` function which prints variable names and the variable means and standard deviations. Also update `main` to use your new class.

Chapter 9

Summary

9.1 Style

- Use interpretable names for your variables.
- Use Hungarian notation (§5.14) to indicate the type and scope of your variables.
- Use indentation and spaces to structure your programs. For example 4 spaces in (or a tab) after {, and four out for the }.
- Document your code.
- Use text to clarify your output.
- Only put more than one statement on a line if this improves readability.

9.2 Functions

- Split large projects up in several files (§5.12).
- First try each function separately on a small problem.
- Avoid the use of global (external) variables using lambda functions or classes.

9.3 Efficient programming

- Prepare a brief outline before you start programming.
- Use standard library functions whenever possible.
- Check if you can solve the problem using available Ox packages (see <https://oxlang.dev>).
- Try to find examples which solve a related problem.
- Experiment with small problems before tackling larger ones.
- Start simulation experiments with a small number of replications. Use the `timer` and `timespan` functions to estimate the time it will take. If it is a few days or weeks, split the program in smaller parts.

9.4 Computational speed

- Use matrices as much as you can, avoiding loops and matrix indexing.
- Use built-in functions where possible.
- When optimizing a program with loops, it usually only pays to optimize the inner most loop. One option is to move loop invariants to a variable outside the loop.
- Avoid using ‘hat’ matrices (such as $X(X'X)^{-1}X'$), i.e. avoid using outer products over large dimensions when not necessary.
- Frequent concatenation in loops (especially using large matrices) can be slow. In that case, it is better to create a matrix of the final size and insert the rows (or columns) instead.
- If necessary, you can link in external C or Fortran code, as explained in the Ox developers manual.

9.5 Noteworthy

- `diagonal` returns a row vector.
- Time-series functions with AR or MA components use the convention of writing the AR and MA coefficients on the right-hand side with a positive sign.

Chapter 10

Using Ox Classes

10.1 Introduction

Object-oriented programming was introduced in Chapter 8. Hopefully it was easier than expected. This chapter will show how to use some of the classes available with Ox. This chapter repeats much of Chapter 8 in another context to help understanding object-oriented programming. First we reiterate the main concepts.

The main vehicle of object-oriented programming is the *class*, which is the definition of an object (somewhat like the abstract concept of a car). For it to work in practice requires creating *objects* of that class (your own car is the object: it is difficult to drive around in an abstract concept). It is with these objects that the program works.

Classes have two types of *members*: variables (the *data*) and functions (the *methods* which work on that data).

Inheritance is important: a van can inherit (or derive) much of its functionality from a basic car. This avoids the need to start again from scratch. The same is applied in programming: a derived class inherits all the members of the base class; only the new bells and whistles need to be added.

Say we wish to implement a Monte Carlo experiment. The basic class will store the replication results, and do all the bookkeeping. To be general, we wish it to be unaware of what it is actually simulated. But how can it call a function (called *Generate*, say), if that function doesn't exist yet? (And it will not exist until we design the actual experiment.) This is where a *virtual* function comes into play: if a derived class has its own new version of *Generate*, the base class will automatically use that one, instead of the original version.

A *constructor* function is called when the object is created, and is used to do all necessary initializations. A constructor has the same name as the class. A *destructor* function cleans up (if necessary) when finished. A destructor has the same name as the class, but is prefixed with a \sim .

10.2 Regression example

The very first example using classes was given in §4.7. Here is another example using one (actually: four!) of the preprogrammed classes:

```

oxintro10a>oxrun.dev
#include <oxstd.oxh>
#import <pcfiml>
main()
{
    decl model = new PcFiml();
                // PcFiml : Modelbase : Database : Sample
    model.Load("data/data.oxdata");
    model.Info(); // Print database summary
                // create deterministic variables in the database
    model.Deterministic(FALSE);
                // formulate the model
    model.Select("Y", { "CONS", 0, 1 } ); // lag 0 to 1
    model.Select("X", { "INC", 0, 1 } ); // lag 0 to 1
    model.Select("X", { "Constant" } ); // no lags!

    model.SetSelSample(-1, 1, -1, 1); // maximum sample
    model.Estimate(); // estimate the model
    delete model;
}

```

This estimates a model by ordinary least squares:

$$y_t = \beta_0 + \beta_1 y_{t-1} + \beta_2 x_t + \beta_3 x_{t-1} + \epsilon_t,$$

where y_t is *CONS* (consumption from the artificial data set *data.oxdata*), x_t is *INC* (income).

The *PcFiml* class is for estimating linear regression models (even multivariate), with options for diagnostic testing, cointegration analysis and simultaneous equations estimation (using Full Information Maximum Likelihood estimation, hence the name). Here it is used in its simplest form.

A few points related to the program:

- The necessary code must be linked in. Here that is achieved by importing *pcfiml*, which actually links four *.oxo* files: *maximize.oxo*, *modelbase.oxo*, *database.oxo* and *pcfiml.oxo*.
- *new* creates a new object of the *PcFiml* class, and puts it in the variable called *model*.
- Compare the data loading part with the code in §4.7. They're exactly the same! This is because *PcFiml* derives from the *Database* class, so it automatically inherits all the data input/output functionality.
- To call functions from the object, use *.* (or *->*, prior to Ox version 2.00 only *->* was allowed). From the outside there is only access to functions, not to any of the data members (but this can be overridden).
- *Deterministic()* creates a constant term, trend, and seasonal dummies. Again, this is *Database* code being used.

- `Select` formulates the model: "Y" for dependent and lagged dependent variables, "X" for the other regressors. The second argument is an array with three elements: variable name, start lag and end lag.
- `SetSelSample` sets the maximum sample, but could also be used to select a sub-sample.
- `Estimate` estimates and prints the results. How much work would this have been starting from scratch?
- Finally, when done, we delete the object. When creating objects without calling `delete` afterwards, memory consumption will keep on increasing.

The output from the program includes:

```

---- System estimation by OLS ----
The estimation sample is 1953(2) - 1992(3)
CONS          lag 0   status Y
CONS          lag 1   status Y
INC           lag 0
INC           lag 1
Constant      lag 0

              coefficients  std. errors  t-values  t-prob
CONS_1        0.98587      0.027620   35.695    2.2597e-76
INC           0.49584      0.037971   13.059    1.0409e-26
INC_1        -0.48491      0.041031   -11.818   2.3960e-23
Constant      2.5114        11.393     0.22043   0.82583

RSS          337.313361  T          158  k          4
sigma        1.479982  R^2        0.9882680  Adj.R^2    0.9880394
mean(Y)      875.848  se(Y)      13.5326  var(Y)     181.971
loglik       -59.91497  loglik+c   -284.11  det-omega  2.1349

```

- [10.1] Run the above program. When successful, add *INFLAT* to the model (without any lags), and re-estimate. Surprised by the large change in the coefficients? Then see the chapter called Intermediate Econometrics in [Hendry and Doornik \(2001\)](#).
- [10.2] Building on the knowledge of the previous chapters, replicate the coefficient estimates from the first model. Use `loadmat` to load the data in a matrix (Ch. 4), the order of the data is: *CONS*, *INC*, *INFLAT*, *OUTPUT*. Use `lag0` to create lagged variables, and `olsc` to do the regression.

10.3 Simulation example

The example discussed here generates data from a standard normal distribution, and estimates the mean and variance (similar to §5.11, but now using analytical solutions). It also tests whether the mean is different from zero.

The data are drawn from a normal distribution, so that the data generation process (DGP) is:

$$y_t = \mu + \epsilon_t \text{ with } \epsilon_t \sim N(0, \sigma^2).$$

We choose $\mu = 0$ and $\sigma^2 = 1$. The parameters are estimated from a sample of size T :

$$\hat{\mu} = T^{-1} \sum_{t=0}^{T-1} y_t, \quad \hat{\sigma}^2 = T^{-1} \sum_{t=0}^{T-1} (y_t - \hat{\mu})^2,$$

and

$$\hat{s} = \left\{ (T-1)^{-1} \sum_{t=0}^{T-1} (y_t - \hat{\mu})^2 \right\}^{\frac{1}{2}} = \left\{ \frac{T}{T-1} \hat{\sigma}^2 \right\}^{\frac{1}{2}}.$$

The t -test which tests the hypothesis $H_0: \hat{\mu} = 0$ is: $\hat{t} = T^{\frac{1}{2}} \hat{\mu} / \hat{s}$.

The properties of the estimated coefficients and test statistic are studied by repeating the experiment M times, and averaging the outcome of the M experiments. We could have done this Monte Carlo experiment analytically (which, of course, is much more accurate and also much more general). But for more complicated problems, the analytical solution often becomes intractable, and the Monte Carlo experiment is the only way to investigate the properties of tests or estimators. For more information on Monte Carlo analysis see Davidson and MacKinnon (1993, Ch. 21), Hendry (1995, Ch. 3) and Ripley (1987).

- [10.3] Write a program which draws a sample of size 50 from the DGP and computes $\hat{\mu}$, \hat{s} and \hat{t} . When that is working, add a loop of size M around this. We wish to store the results of the M replications to compute the average $\hat{\mu}$ and \hat{s} from those M numbers. The added code could be of the form (this is incomplete):

```

oxintro10b
decl cm = 1000;
decl mresults = zeros(3, cm); // precreate matrix

parallel for (i = 0; i < cm; ++i)
{
    // generate results
    mresults[0][i] = // store mean here
    mresults[1][i] = // store std.dev. here
    mresults[2][i] = // store t-value here
}
// compute averages of mean and std.dev
// perhaps draw histogram of t-values
```

Because we create `mresults` before the loop, it can be made `parallel`. Theory tells us that the t -values have a Student- t distribution with 49 degrees of freedom. In `mresults[2][]` we now have 1000 drawings from that distribution, and a histogram of this data should be close to a $t(49)$ distribution. Similarly, after sorting the numbers, entry 949 should correspond to the 5% critical value which may be found in tables. This is also called the 95% quantile of the test.

- [10.4] Add code to your program to print the 95% quantile of the simulated t -values. Use both the `sortr()` function and the `quantiler()` function. Also report the theoretical quantile from a $t(49)$ distribution using `quant()`.

So much for the theory. The following program repeats the Monte Carlo experiment, based on the `Simulation` class, and using $T = 50$ and $M = 1000$. The new class `SimNormal` derives from the `Simulation` class. Now there seems to be a setback: the new program is more than twice as long as the not object-oriented version. Indeed, for small, simple problems there is a case for sticking with the simple code. Although: we now do get a nice report as output (without any effort), which is still missing from the simple code. And, without modifications we can run it for various sample sizes at once. In the next section, we will create our own (simpler) version of the `Simula` class.

►[10.5] Run the program below. Note that when a Monte Carlo program is modified, there could be two reason for getting different results: (1) the initial seed of the random generator is different, (2) a different amount of random numbers is drawn, so after one replication they don't match anymore.

```

oxintro10c>oxrun.dev
#include <oxstd.oxh>
#import <simulator> // import simulation header and code

/*----- SimNormal : Simulator -----*/
class SimNormal : Simulator // inherit from simulation
{
    SimNormal(); // constructor
    // Generate() replaces the virtual function with the
    // same name of the base class to generate replications
    virtual Generate(const iRep, const cT, const mxT);
};
SimNormal::SimNormal() // define constructor
{
    Simulator(<50>, 50, 1000, TRUE, -1,
              <0.2,0.1,0.05,0.01>, // p-values to investigate
              <0,1>); // true coefs: mean=0, sd=1
    SetTestNames({"t-value"}); // set names
    SetCoefNames({"constant", "std.dev"});
}
SimNormal::Generate(const iRep, const cT, const mxT)
{
    decl my = rann(cT, 1); // generate data
    decl meany = meanc(my); // mean of y
    decl sdevy = sqrt(cT * varc(my) / (cT-1)); // std.dev y

    decl coef = meany | sdevy; // mean,sdev of y
    decl test = meany / (sdevy / sqrt(cT)); // t-value mean
    decl pval = tailt(test, cT-1); // t(T-1) distributed

return {1, coef, pval, test};
}
/*----- END SimNormal : Simulator -----*/
main()
{
    decl experiment = new SimNormal(); // create object
    experiment.Simulate(); // do simulations
}

```

►[10.6] We obtained the output below. Try to interpret these results.

```
T=50, M=1000, RNG=MWC_52: loop seed, common seed=-1

moments of test statistics
              mean      std.dev    skewness  ex.kurtosis
t-value      0.026719    1.0312    -0.11818   0.35272

critical values (tail quantiles)
              20%      10%        5%        1%
t-value      0.88528    1.3064    1.5979     2.3533

rejection frequencies
              20%      10%        5%        1%
t-value      0.20900    0.10200   0.044000   0.0090000
[ASE]        0.012649   0.0094868 0.0068920   0.0031464

moments of estimates
              mean      MCSD
constant     0.0035382   0.14254
std.dev      0.99110     0.10118

biases of estimates
              mean bias    MCSE      RMSE    true value
constant     0.0035382    0.0045075 0.14258   0.00000
std.dev      -0.0089031    0.0031997 0.10157   1.0000
```

10.4 MySimula class

10.4.1 The first step

A class is declared as follows (the part in square brackets is only used when deriving from an existing class, as in the example above):

```
class classname [: baseclass]
{
    classmembers
};
```

Note the semicolon at the end.

Our class starts as:

```
class MySimula
{
    MySimula();           // constructor
};
```

Where the constructor is already *declared* as a first function member. A member function is then *defined* as

```

class_name :: memberfunction ( arguments )
{
    functionbody
}

```

Adding the definition for the constructor yields:

```

#include <oxstd.oxh> oxintro10d
class MySimula
{
    MySimula();           // constructor
};
MySimula::MySimula()
{
    println("MySimula constructor called");
}
main()
{
    decl mysim = new MySimula();
}

```

►[10.7] Run the program given above.

10.4.2 Adding data members

The main variables needed are M , T , and storage for the replicated mean and standard deviations (we concentrate on those first, calling them ‘coefficients’). We use Hungarian notation (§5.14). The constructor receives values for M , T as arguments. A `Simulate` function is used to do the experiment, and a `Report` function to report the results.

You may have noted that from inside a member function, we can call other member functions without needing the dot notation (but `this.` is allowed). Member variables may be accessed directly.

►[10.8] Run the modified program below. Add a `Generate()` function to the class; this should be called from within the replication loop, and have two arguments: the replication number, and the sample size.

```

                                                                    oxintro10e>oxrun.dev
#include <oxstd.oxh>

class MySimula
{
    decl m_cT;           // sample size
    decl m_cRep;        // no of replications
    decl m_mCoefVal;    // coeff.values of each replication

    MySimula(const cT, const cM); // constructor
    Simulate();           // do the experiment
    Report();            // print simulation results
};
MySimula::MySimula(const cT, const cM)
{
    m_cRep = cM;
    m_cT = cT;
}
MySimula::Simulate()
{
    decl i;

    for (i = 0; i < m_cRep; ++i)
    {
        // do the replication
    }
    Report();
}
MySimula::Report()
{
    println("Did nothing ", m_cRep, " times");
}

main()
{
    decl mysim = new MySimula(50, 1000);
    mysim.Simulate();
}

```

10.4.3 Inheritance

The base class MySimula is intended to remain unaware of the actual experiment. To simulate the drawings from the normal distribution, create a SimNormal class deriving from MySimula. The one difference from C++ is that the constructor of the base class is *not* automatically called, so we must call it explicitly from the SimNormal constructor. We assume that you did the previous exercise, and created the same Generate() in MySimula as present in SimNormal:

```

// ...
// code for MySimula is unchanged
// apart from addition of Generate();

class SimNormal : MySimula
{
    SimNormal(const cT, const cM); // constructor
    Generate(const iRep, const cT);
};
SimNormal::SimNormal(const cT, const cM)
{
    MySimula(cT, cM); // call base class constructor
}
SimNormal::Generate(const iRep, const cT)
{
}

main()
{
    decl mysim = new SimNormal(50, 1000);

    mysim.Simulate();
}

```

oxintro10f (part of)

- [10.9] Reduce the number of replications to 2. In MySimula's Generate() add a line printing 'MySimula::Generate()'. In SimNormal's Generate() a line printing 'SimNormal::Generate()'. When you run this, the output will indicate that it is MySimula's version which is called.

10.4.4 Virtual functions

The previous exercise showed that we have not achieved our aim yet: the wrong Generate() is called.

- [10.10] In the MySimula class declaration replace
- ```
Generate(const iRep, const cT);
```

with

```
virtual Generate(const iRep, const cT);
```

and rerun the program. Did you see the difference?

So, adding the virtual keyword to the function declaration in MySimula solved the problem: the generator of the derived class is called. There was no need to do the same for the Generate() function in SimNormal (but there is if we wish to derive from SimNormal and replace its Generate() yet again).

What if MySimula wishes to call its own Generate()? In that case, prefix it with MySimula::, so that the loop body reads:

```
MySimula::Generate(i, m_cT);
```

SimNormal can have access to MySimula's Generate() in the same way.

### 10.4.5 Last step

That really is all we need to know from object-oriented programming to finish this project. It remains to fill in the actual procedures. Of course, the preprogrammed Simulation class is much more advanced, but therefore a bit harder to use.

►[10.11] Perhaps you should try to complete the program yourself first. If you got stuck along the way, the code up to the previous exercise is provided as *oxintrol0y.ox*.

## 10.5 Conclusion

The Ox implementation of object-oriented facilities avoids complexity, while retaining the most important functionality.

Several useful packages for Ox are downloadable. Often these derive from the Database class, as for example the Arfima (for estimating and forecasting fractionally integrated models) and DPD packages (for estimating dynamic panel data models). You can look at these to learn more about object-oriented programming. In addition, these classes can easily be plugged into a simulation class. So, once the estimation side is done, the Monte Carlo experimentation can be started very rapidly. And, no global variables: you can use several objects at once, without any possibility of unexpected side effects.

The next chapter will apply the object-oriented features to develop a small package for probit estimation.

# Chapter 11

## Example: probit estimation

### 11.1 Introduction

In this chapter all the principles of the previous chapters are applied to develop procedures for probit estimation. The theory is briefly reviewed, and then applied to write programs of increasing sophistication. Five version of the program are developed:

- (1) Maximum likelihood estimation, numerical derivatives, using global variables along the lines of §5.11.
  - (2) Addition of analytical first derivatives, numerical computation of standard errors.
  - (3) Avoid global variables by using a class, derived from `Database`.
  - (4) Create a more sophisticated class, allowing model formulation by variable name.
  - (5) Derive from `Modelbase`, and create an interactive version for `OxMetrics`.
- (mc) Use the class in a Monte Carlo experiment.

### 11.2 The probit model

Several earlier examples involved least squares estimation, where it is assumed that the dependent variable is continuous. A discrete choice model is one where the dependent variable denotes a category, so it is discrete and not continuous. This section briefly reviews the application of maximum likelihood estimation to such models. General references are [McFadden \(1984\)](#), [Cramer \(1991\)](#), and [Amemiya \(1981\)](#) among others.

An example of a categorical dependent variable is:

$$\begin{aligned} y_i &= 0 && \text{if household } i \text{ owns no car,} \\ y_i &= 1 && \text{otherwise.} \end{aligned}$$

This example is a binary choice problem: there are two categories and the dependent variable is a dummy variable. With a discrete dependent variable, interest lies in modelling the probabilities of observing a certain outcome. Write

$$p_i = P \{y_i = 1\}.$$

To test our programs we use the data from [Finney \(1947\)](#), provided in the files `finney.oxdata` (in the `ox/data` folder). This data set holds 39 observations on the occurrence of vaso-constriction (the dummy variable, called ‘vaso’) in the skin of the fingers after taking a single deep breath. The dose is measured by the volume of air inspired (‘volume’) and the average rate of inspiration (‘rate’). Some graphs of the data are given in [Hendry and Doornik \(2001, Ch. 9\)](#).

Applying OLS to these data has several disadvantages here. First, it doesn’t yield proper probabilities, as it is not restricted to lie between 0 and 1 (OLS is called the linear probability model:  $p_i = x_i' \beta$ ). Secondly, the disturbances cannot be normally distributed, as they only take on two values:  $\epsilon_i = 1 - p_i$  or  $\epsilon_i = 0 - p_i$ . Finally, they are also heteroscedastic:  $E[\epsilon_i] = (1 - p_i)p_i + (0 - p_i)(1 - p_i) = 0$ ,  $E[\epsilon_i^2] = (1 - p_i)^2 p_i + (0 - p_i)^2 (1 - p_i) = (1 - p_i)p_i$ .

A simple solution is to introduce an underlying continuous variable  $y_i^*$ , which is not observed. Observed is instead:

$$y_i = \begin{cases} 0 & \text{if } y_i^* < 0, \\ 1 & \text{if } y_i^* \geq 0. \end{cases} \quad (11.1)$$

Now we can introduce explanatory variables:

$$y_i^* = x_i' \beta - \epsilon_i.$$

and write

$$p_i = P\{y_i = 1\} = P\{x_i' \beta - \epsilon_i \geq 0\} = F_\epsilon(x_i' \beta).$$

Observations with  $y_i = 1$  contribute  $p_i$  to the likelihood, observations with  $y_i = 0$  contribute  $1 - p_i$ :

$$L(\beta | X) = \prod_{\{y_i=0\}} (1 - p_i) \prod_{\{y_i=1\}} p_i, \quad (11.2)$$

and the log-likelihood becomes:

$$\ell(\beta | X) = \sum_{i=1}^N [(1 - y_i) \log(1 - p_i) + y_i \log p_i] = \sum_{i=1}^N \ell_i(\beta). \quad (11.3)$$

The choice of  $F_\epsilon$  determines the method. Using the logistic distribution leads to *logit* (which is analytically simpler than probit). The standard normal distribution gives *probit*. Writing  $\Phi(z)$  for the standard normal probability at  $z$ :

$$p_i = \Phi(x_i' \beta).$$

As explained in §5.9, we prefer to maximize  $\ell/N$ , rather than  $\ell$ .

## 11.3 Step 1: estimation

```

 probit1>oxrun.dev
#include <oxstd.oxh>
#import <maximize>

static decl s_mY; // global data
static decl s_mX; // global data

fProbit(const vP, const adFunc, const avScore,
 const amHessian)
{
 decl prob = probn(s_mX * vP); // vP is column vector

 adFunc[0] = double(
 meanc(s_mY .* log(prob) + (1-s_mY) .* log(1-prob)));

return 1; // 1 indicates success
}

main()
{
 decl vp, dfunc, ir;

 println("Probit example 1, run on ", date());

 decl mx = loadmat("data/finney.oxdata");

 s_mY = mx[][0]; // dependent variable: 0,1 dummy
 s_mX = 1 ~ mx[][3:4]; // regressors: 1, Lrate, Lvolume
 delete mx;

 vp = <-0.465; 0.842; 1.439>; // starting values

 MaxControl(-1, 1); // print each iteration
 // maximize
 ir = MaxBFGS(fProbit, &vp, &dfunc, 0, TRUE);

 print("\n", MaxConvergenceMsg(ir),
 " using numerical derivatives",
 "\n Function value = ", dfunc * rows(s_mY),
 "; parameters:", vp);
}

```

We can discuss this program from top to bottom. First, in addition to `oxstd.oxh`, we use `#import` to include the `maximize.oxh` header file, and link in the `maximize.oxo` maximization code (cf. §5.10).

The likelihood function is set up as in §5.9, forcing us to use external variables: the  $N \times 1$  matrix  $Y$ , containing only zeros and ones, and the  $N \times k$  matrix  $X$  which holds the regressors.

`fProbit()` evaluates the log-likelihood  $\ell(\beta)$  at the provided parameter values (`vP` holds  $\beta$  as a column vector). The function value is returned in the `dFunc` argument (see §2.9.7). The `fProbit()` function itself returns a 1 when it succeeds, and should return

a 0 otherwise.

The probabilities  $p_i = \Phi(x_i'\beta)$  are computed in one statement, because all the observations are stacked:

$$P = \begin{pmatrix} p_1 \\ \vdots \\ p_N \end{pmatrix} = \Phi(X\beta).$$

All the likelihoods can also be computed in one step as

$$(1 - Y) .* \log(1 - P) + Y .* \log(P).$$

The resulting  $N \times 1$  vector is summed using `sumc()`. This returns a  $1 \times 1$  matrix, which is converted to a double using the `double()` typecast function.

This takes us to the `main()` function. Here the first step is to load the data matrix into the variable `mx`. The first column is the  $y$  variable, which is stored in `g_mY`. The fourth and fifth (remember: indexing starts at zero) are concatenated with a 1 to create a constant term (cf. §2.4), this is stored in `g_mX`. Now `mx` is not needed anymore, and `delete` is used to remove its contents from memory.

Starting values have been chosen on the basis of a prior linear regression, using scaled OLS coefficients:  $2.5\beta_{OLS} - 1.25$  for the constant term, and  $2.5\beta_{OLS}$  for the remaining coefficients. `MaxControl` leaves the maximum number of iterations unchanged, but ensures that the results of each iteration is printed out. Initially that is useful, but as the program gets better, we shall want to switch that off again.

We do not need to specify the initial (inverse) Hessian matrix for `MaxBFGS`. The argument 0 makes it use the identity matrix, which is the usual starting ‘curvature’ measure for BFGS. As the maximization process proceeds, that matrix will converge to the true (inverted) Hessian matrix. Also, the matrix on output is not useful for computing standard errors: imagine starting with the identity matrix, from the optimum values. Then the procedure will converge immediately, and the output matrix will still be the identity matrix.

Finally, when `MaxBFGS()` is finished, it returns the status of the final results as an integer. These are predefined constants, and can be translated to a text message using `MaxConvergenceMsg()`. Hopefully the return value is `MAX_CONV`, corresponding to strong convergence.

The maximization converges quickly. Note that the number of iterations depend on the current settings for the convergence criteria (adjusted using `MaxControl`) and on whether you used  $\ell$  or  $\ell/n$ . The final part of the output is:

```

Position after 14 BFGS iterations
Status: Strong convergence
parameters
 -1.5044 2.5123 2.8619
gradients
-5.7314e-006 -7.2320e-006 5.8091e-006
function value = -0.375475147828

```

Strong convergence using numerical derivatives

Function value = -14.6435; parameters:

```

-1.5044
 2.5123
 2.8619

```

## 11.4 Step 2: Analytical scores

Computing analytical scores requires differentiating the log-likelihood with respect to  $\beta$ . This can be done inside the summation in (11.3):

$$\frac{\partial \ell_i(\beta)}{\partial \beta_k} = (1 - y_i) \left( \frac{-1}{1 - p_i} \right) \frac{\partial p_i}{\partial \beta_k} + (y_i) \left( \frac{1}{p_i} \right) \frac{\partial p_i}{\partial \beta_k} = \frac{y_i - p_i}{(1 - p_i)p_i} \frac{\partial p_i}{\partial \beta_k}.$$

The derivative of the normal probability is the normal density:

$$\frac{\partial p_i}{\partial \beta_k} = \frac{\partial \Phi(x'_i \beta)}{\partial \beta_k} = \phi(x'_i \beta) x_{ik}.$$

As for the log-likelihood, the full factor multiplying  $x_{ik}$  can be computed in one go for all individuals:

$$W = (Y - P) .* \phi ./ ((1 - P) .* P).$$

$W$  is an  $N \times 1$  vector which has to be multiplied by each  $x_{.k}$  to obtain the three score values for each individual log-likelihood. Again, one multiplication will do:

$$S = W .* X.$$

This uses the ‘tabular’ form of multiplication (§3.4): all three columns of  $X$  are multiplied by the one column in  $W$ ; the resulting  $S$  is an  $N \times 3$  matrix. Then summing up each column and dividing by  $N$  gives the derivatives of the complete scaled log-likelihood. Because `MaxBFGS` expects a column vector, this has to be transposed.

The analytical derivatives are more accurate than the numerical ones. A small difference may just be noted when comparing the final gradients of the two programs.

```

fProbit(const vP, const adFunc, const avScore,
 const amHessian)
{
 decl prob = probn(s_mX * vP); // vP is column vector
 decl tail = 1 - prob;

 adFunc[0] = double(
 meanc(s_mY .* log(prob) + (1-s_mY) .* log(tail)));

 if (avScore) // if !0: compute score
 {
 decl weight = (s_mY - prob) .* densn(s_mX * vP)
 ./ (prob .* tail);
 avScore[0] = meanc(weight .* s_mX)'; // need column
 }

 return 1; // 1 indicates success
}

```

*probit2 (part of)*

The final program also computes estimated standard errors of the coefficients using numerical second derivatives of the log-likelihood at the converged parameter values:

```

// if converged: compute standard errors
if (ir == MAX_CONV || ir == MAX_WEAK_CONV)
{
 if (Num2Derivative(fProbit, vp, &mhess))
 {
 decl mcover = -invert(mhess) / cn;
 print("standard errors:", sqrt(diagonal(mcover)'));
 }
}

```

*probit2 (part of)*

These are only computed when there is convergence. The complete estimated variance-covariance matrix is minus the inverse of the second derivatives:

$$\widehat{V}_1[\widehat{\beta}] = -Q(\widehat{\beta})^{-1}, \quad \text{where } Q = \frac{\partial^2 \ell}{\partial \beta \partial \beta'}.$$

The standard errors are the square root of the diagonal of that matrix. Another way of computing the variance can be obtained from the outer product of the gradients (OPG):

$$\widehat{V}_2[\widehat{\beta}] = (S'S)^{-1}.$$

►[11.1] Adjust `fProbit` in such a way that it returns  $S'S$  in the `amHessian` argument. Use this to compare the two variance estimates. The result should be approximately:

|                      |         |         |         |
|----------------------|---------|---------|---------|
| standard errors:     | 0.63750 | 0.93651 | 0.90810 |
| OPG standard errors: | 0.59983 | 1.1911  | 1.0142  |

►[11.2] Recompute using `MaxNewton` (second derivatives required) and/or `MaxSimplex`. Compare the number of iterations and computing time.

## 11.5 Step 3: removing global variables: the Database class

Step 3 uses object-oriented techniques (see Chapters 8 and 10) to remove the global variables. The Database class is used to derive from in order to facilitate data loading. The code listed illustrates by omitting that part of the program which is nearly identical to the previous program (apart from the switch from `g_mY`, `g_mX` to `m_mY`, `m_mX`):

```

 probit3 (outline of)
#include <oxstd.oxh>
#import <database>
#import <maximize>

class Probit : Database
{
 decl m_mY; /* dependent variable [cT][1] */
 decl m_mX; /* regressor data vector [cT][m_cX] */

 Probit(); /* constructor */
 Estimate(); /* does the estimation */
 fProbit(const vP, const adFunc, const avScore,
 const amHessian); /* log-likelihood */
};
Probit::Probit()
{
 Database(); // initialize base class
 println("Probit example 3, object created on ", date());
}
Probit::fProbit(const vP, const adFunc, const avScore,
 const amHessian)
{
 //..... as before, using m_mY, m_mX instead of s_mY, s_mX
}
Probit::Estimate()
{
 //as main() before, using m_mY, m_mX instead of s_mY, s_mX
}

main()
{
 decl probitobj = new Probit(); // create the object
 probitobj.Estimate(); // load the data, estimate the model
}

```

The Probit class derives from the Database class. It adds two data members for  $Y$  and  $X$ , and three functions:

1. The constructor to call the base class constructor and print a message.
2. The `loglikelihood` function.
3. The `Estimate()` function contains the code which was previously in `main()`: loading the data, estimating and then printing the results.

The new `main()` creates the object, calls `Estimate()`, and deletes the object.

## 11.6 Step 4: independence from the model specification

The version of Step 3 has a serious defect: for each new model formulation the `Estimate()` function must be modified. Ideally, the code of the class works for any binary probit model, and not just for this one. Modifications to achieve this take us closer to the approach taken in packages such as `Arfima` and `DPD`.

First, the old `Probit::Estimate()` is split in five parts:

### 1. `InitData()`

To initialize the data: transfer the selected variables from the database to `m_mY` and `m_mX`.

```

Probit::InitData() probit4 (part of)
{
 m_mY = GetGroupLag(Y_VAR, 0, 0); // get Y data
 m_mX = GetGroup(X_VAR); // and X data; SetSelSample
 m_cT = m_iT2sel - m_iT1sel + 1; // sets m_iT?sel
 m_vPar = m_mCovar = <>; // throw old values away
 return TRUE;
}

```

### 2. `InitPar()`

To set the initial parameter values: at this stage we just set them to zero. This is not optimal, but fortunately doesn't matter so much for binary Probit (which has a concave likelihood).

```

Probit::InitPar()
{
 m_vPar = zeros(columns(m_mX), 1); // start from zero
 return TRUE;
}

```

### 3. `DoEstimation()`

Does the basic estimation by calling `MaxBFGS`.

```

Probit::DoEstimation(vStart)
{
 m_iResult = MaxBFGS(fProbit, &vStart, &m_dLogLik, 0,
 FALSE); // m_iResult: return code, vStart: new pars
 m_dLogLik *= m_cT; // change to unscaled log-lik
 return {vStart, "BFGS", FALSE}; // three return values
}

```

### 4. `Covar`

To compute the variance-covariance matrix and store the result in the `m_mCovar` variable.

### 5. `Output`

To print the output.

### 6. `Estimate()`

Calls all the previous functions.

### 7. The constructor sets the additional member variables

```

Probit::Probit()
{
 Database(); // initialize base class
 m_iResult = -1;
 m_vPar = m_mCovar = <>;
 println("Probit 4, object created on ", date());
}

```

The resulting program is used in a similar way to the PcFiml example in §10.2. The full listing is in `probit4.ox`. Here is the `main()` function:

```

main() probit4 (part of)
{
 decl probitobj = new Probit();

 probitobj.LoadIn7("data/finney.oxdata"); // load data
 probitobj.Info(); // print database summary
 probitobj.Deterministic(FALSE); // create constant
 // Formulate the model
 probitobj.Select(Probit::Y_VAR, { "vaso" });
 probitobj.Select(Probit::X_VAR, { "Constant",
 "Lrate", "Lvolume" });
 probitobj.SetSelSample(-1, 1, -1, 1); // full sample

 MaxControl(-1, 1); // print each iteration
 probitobj.Estimate(); // estimate
}

```

The Database class has the facility to store a model formulation, which is used in this step. If making five new functions out of the old Estimate seems somewhat excessive, read on to the next section.

- [11.3] Change `InitPar`, to base the starting values on a prior linear regression:  $2.5\beta_{OLS} - 1.25$  for the constant term, and  $2.5\beta_{OLS}$  for the remaining coefficients.

## 11.7 Step 5: using the Modelbase class

The structure adopted in step 4 is quite general: it fits almost all econometric models. The common steps are: load data, formulate a model, initialize data and parameters, estimate and finally print a report. The `Modelbase` class which comes with Ox contains a more general implementation of such steps. `Modelbase` uses virtual functions to allow the user (i.e. the derived class) to specify all the particulars. And, as we shall see in a moment, allows for interactive use of the class. `Modelbase` itself derives from `Database`, so model formulation is unchanged.

### 11.7.1 Switching to the Modelbase class

After we derive from `Modelbase`, we can actually throw most code away:

## 1. InitData()

The default implementation expects a model formulation with Y\_VAR and X\_VAR, and will put the selection in m\_mY and m\_mX. It also sets m\_cT, as well as m\_iT1est, m\_iT2est to hold the index of the first and last database index in the estimation sample. So the Probit::InitData version is not needed. The data members are also in the Modelbase class, so should not be in Probit.

## 2. InitPar()

This is a virtual function in Modelbase, like InitData. Our objective is to call the base class version first, which is achieved by prefixing the call as in Modelbase::InitPar. Without the function would call itself, resulting in a recursive loop until there is stack overflow. It is our responsibility to set the numbers of parameters using SetParCount, and set them to zero (m\_cX is set by InitData).

```

Probit::InitPar() probit5 (part of)
{
 Modelbase::InitPar(); //// first call Modelbase version
 SetParCount(m_cX);
 SetPar(zeros(m_cX, 1)); //// start from zero
 return TRUE;
}

```

3. DoEstimation() is unchanged.

4. Covar is also unchanged. Note that the m\_mCovar variable is part of Modelbase.

5. Output: We can use the Modelbase default, and delete the Probit version.

6. Estimate() The same holds for Estimate.

7. The constructor calls the new base class:

```

Probit::Probit()
{
 Modelbase(); // initialize base class
}

```

Also remember to change the class declaration to:

```

class Probit : Modelbase
{
 Probit(); // constructor
 fProbit(const vP, const adFunc, const avScore,
 const amHess);
 virtual InitPar(); // initialize parameters
 virtual DoEstimation(vPar); // do the maximation
 virtual Covar(); // compute variance-covariance matrix
};

```

After this simplification (the full code is in `probit5.ox`), the program still works. The output is more comprehensive:

```

Modelbase package version 10.0, object created on 26-01-2026
># Model * None * Modelbase
 Dependent variable: vaso
 Estimation sample: 1 - 39

```

Dataset: data/finney.oxdata

|          | Coefficient | Std.Error | t-value | t-prob |
|----------|-------------|-----------|---------|--------|
| Constant | -1.50421    | 0.6375    | -2.36   | 0.024  |
| Lrate    | 2.51206     | 0.9365    | 2.68    | 0.011  |
| Lvolume  | 2.86188     | 0.9081    | 3.15    | 0.003  |

|                                                              |             |                   |             |
|--------------------------------------------------------------|-------------|-------------------|-------------|
| log-likelihood                                               | -14.6435308 | estimation        | None        |
| no. of observations                                          | 39          | no. of parameters | 3           |
| AIC.T                                                        | 35.2870616  | AIC               | 0.904796451 |
| mean(vaso)                                                   | 0.512821    | var(vaso)         | 0.249836    |
| BFGS using analytical derivatives (eps1=0.0001; eps2=0.005): |             |                   |             |
| Strong convergence                                           |             |                   |             |
| Used starting values:                                        | 0.00000     | 0.00000           | 0.00000     |

- [11.4] The output says that this is Modelbase version 1.0. Override the `GetPackageName` and `GetPackageVersion` virtual functions to change this to Probit version 0.1.

## 11.7.2 Splitting the source code

The `probit5.ox` file contains class header, class content and `main()` all in one file. To make it generally useful, this has to be split in three files:

- `bprobit.oxh` – class header file,
- `bprobit.ox` – class implementation file,
- `bprotest.ox` – main (left overs from `probit5.ox`).

*At this stage we also rename the class `Bprobit` to reflect the new structure.*

The header file has one interesting feature:

```

bprobit.oxh (part of)
#ifdef BPROBIT_H_INCLUDED
#define BPROBIT_H_INCLUDED

// class definition

#endif // BPROBIT_H_INCLUDED
```

This prevents the header file from being included more than once in a source code file (necessary because a class can be defined only once). So if you now write in your code file:

```
#include "bprobit.oxh"
#include "bprobit.oxh"
```

Then the first time `BPROBIT_H_INCLUDED` is not defined, and the full file is included. The second time `BPROBIT_H_INCLUDED` is defined, and the part between `#ifndef` and `#endif` is skipped.

The `bprobit.oxh` file already imports `modelbase` (and with it `database` and `maximize`), which then is not needed in the main code anymore as long as `bprobit.h` is included. The top of `bprotest.ox` includes `bprobit.h`, but also the `Ox` file directly (as this file is still under development at this stage, it is inconvenient to create a precompiled (.`oxo`) file):

```
#include <oxstd.oxh>
#import "bprobit"
```

*bprotest (part of)*

### 11.7.3 Putting it all together: bprobit.ox and bprobit.oxh

If you have tried to follow along, you already have the correct code and header file. But for completeness we list them below.

```
#include <oxstd.oxh>
#include "bprobit.oxh"

Bprobit::Bprobit()
{
 Modelbase(); // initialize base class
}
Bprobit::fProbit(const vP, const adFunc, const avScore, const amHess)
{
 decl prob = probn(m_mX * vP), tail = 1 - prob;

 adFunc[0] = double(
 meanc(m_mY .* log(prob) + (1-m_mY) .* log(tail)));

 if (avScore)
 {
 decl weight = (m_mY - prob) .* densn(m_mX * vP)
 ./ (prob .* tail);
 avScore[0] = meanc(weight .* m_mX)';
 }
return 1; // 1 indicates success
}
Bprobit::InitPar()
{
 Modelbase::InitPar(); // first call Modelbase version
 SetParCount(m_cX);
 SetPar(zeros(m_cX, 1)); // start from zero
 return TRUE;
}
Bprobit::DoEstimation(vStart)
{
 m_iResult = MaxBFGS(fProbit, &vStart, &m_dLogLik, 0, FALSE);
 // m_iResult has return code, vStart will have new params
 m_dLogLik *= m_cT; // change to unscaled log-lik
 return {vStart, "BFGS", FALSE}; // three return values
}
Bprobit::Covar()
{
 decl mhess;
 if (Num2Derivative(fProbit, m_vPar, &mhess))
 {
 m_mCovar = -invert(mhess) / m_cT;
 }
}
```

*bprobit.ox*

```

 bprobit.oxh
#ifdef BPROBIT_H_INCLUDED
#define BPROBIT_H_INCLUDED

#import <modelbase>

class Bprobit : Modelbase
{
 Bprobit(); // constructor
 fProbit(const vP, const adFunc, const avScore, const amHess);
 virtual InitPar(); // initialize parameters
 virtual DoEstimation(vPar); // do the maximization
 virtual Covar(); // compute variance-covariance matrix
};
#endif // BPROBIT_H_INCLUDED

```

It is useful to test this binary probit application before proceeding. The following example imports the package and estimates a model using the Finney data set:

```

 bprobitest1>oxrun.dev
#include <oxstd.oxh>
#import "bprobit"


main()
{
 decl probitobj;

 probitobj = new Bprobit(); // create object
 // load data file into object
 probitobj.Load("data/finney.oxdata");
 probitobj.Deterministic(FALSE); // create constant
 // Formulate the model
 probitobj.Select(Bprobit::Y_VAR, { "vaso" });
 probitobj.Select(Bprobit::X_VAR, { "Constant",
 "Lrate", "Lvolume" });
 probitobj.SetSelSample(-1, 1, -1, 1); // full sample
 probitobj.Estimate(); // estimate
}


```

### 11.7.4 Interactive use using OxMetrics

If you have OxMetrics, you can start using the Probit package interactively. From the OxMetrics Apps panel, click on the orange + to add `bprobit.ox`

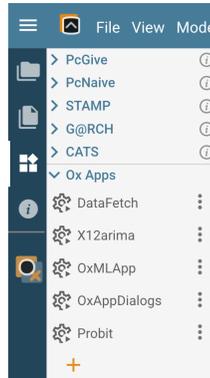

OxMetrics needs to know where the code is, and the name of the class. The latter must match exactly. Once added, it is listed under Ox Apps:

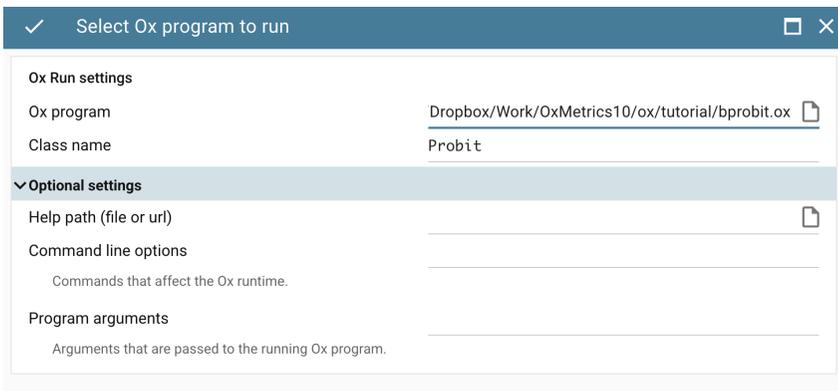

- [11.5] Load the Finney data set in OxMetrics, and re-estimate the model of this chapter using the interactive version.

### 11.7.5 Extending the interface

Well, it turned out to be very simple to create an interactive version. No new code was required, just loading it in OxMetrics. This works, because the `Modelbase` class hides all the complexities. If your class is not derived from `Modelbase`, OxMetrics will not be able to handle it.

The Test menu is currently empty, and to add entries, we need to write additional Ox code for the `Bprobit` class. It is also possible to add dialogs. Examples of this are in the `Arfima` and `DPD` packages (you can see the code, and use it as a starting point for your own package). The full documentation is in the Ox developers book. We end this section by adding some entries to the Test menu.

- [11.6] Add the `SendMenu` code listed below as a function member to `Bprobit`. Afterwards, you need to restart the `Bprobit` class in `OxMetrics`. This can be done by aborting the app. Try both restrictions tests.

```

SendMenu(const sMenu) sendmenu
{
 if (sMenu == "Test")
 {
 return
 {
 {"&Graphic Analysis", "OP_TEST_GRAPHICS"},
 0,
 {"&Exclusion Restrictions...", "OP_TEST_SUBSET"},
 {"&Linear Restrictions...", "OP_TEST_LINRES"}
 };
 }
}

```

Remember that, when working with classes made by others, it is better to create a derived class, and put your code in there. Also note that the same code will still work from other Ox programs, as well as interactively.

## 11.8 A Monte Carlo experiment

One of the claims we made was that, once wrapped up in a class, it is easier to reuse the code. To make our case, we implement with a Monte Carlo experiment of Probit estimation. Once again several steps are involved.

We use the `Bprobit` class from the previous section. All files in this section are `bprobit.*` and `bpro*.*`, where the `b` stands for binomial.

### 11.8.1 Extending the class

A few extensions are required to make the class more useful for Monte Carlo analysis. When working from someone else's class, this is best done by deriving our custom version from it through inheritance. Here we have control over the class (which is still quite basic). We need:

- `SetPrint(const fPrint)` – to switch automatic printing on/off,
- `IsConverged()` – to check for convergence after estimation,
- `GetPar()` – returns estimated parameters,
- `GetStdErr()` – returns estimated standard errors of parameters.

All functions are supplied by `Modelbase`, except for `IsConverged()`. To implement that, we check if `GetModelStatus()` returns the predefined constant `MS_ESTIMATED`.

### 11.8.2 One replication

Continuing with the step-wise refinement of the program, we start with a one-replication experiment. Instead of loading a datafile, and formulating a model specific to that data, we need to create artificial data ourselves:

```

#include <oxstd.oxh>
#import "bprobit"

main()
{
 decl probitobj, ct = 100, x, y;

 probitobj = new Bprobit(); // create object
 probitobj.Create(1, 1, 1, ct, 1); // create database
 probitobj.Deterministic(FALSE); // create constant
 x = ranu(ct, 1); // artificial x
 y = 1 + x + rann(ct, 1); // artificial y
 y = y .< 1 .? 0 .: 1; // translate into 0,1 variable

 probitobj.Append(x ~ y, {"x", "y"}); // extend database
 probitobj.Info(); // print database summary
 // formulate the model: y on 1,x
 probitobj.Select(Bprobit::Y_VAR, { "y" });
 probitobj.Select(Bprobit::X_VAR, { "Constant", "x" });
 probitobj.SetSelSample(-1, 1, -1, 1); // full sample

 probitobj.Estimate(); // maximize
}

```

- [11.7] Run this program for various sample sizes. An experiment like this can be useful to check your coding if you use a large sample size (assuming that the estimator is consistent): the obtained parameters should be reasonably close to the input values. For  $N = 100\,000$  we found:

```

The dependent variable is: y
 Coefficient Std.Error t-value t-prob
Constant -0.00744270 0.008144 -0.914 0.361
x 1.01175 0.01481 68.3 0.000

```

Can you explain why the constant term is insignificant?

### 11.8.3 Many replications

Most of the work is done now. What remains is to create a replication loop, and accumulate the results.

- Parameter estimates and their standard errors are stored by appending the results to `params` and `parses` respectively. This starts from an empty matrix (starting from 0 adds a column of zeros and affects the outcomes).
- The  $x$  variable is kept fixed, but the  $y$  is recreated at every experiment. It is stored in the database of the probit object, from where the estimation function will retrieve it.
- The results are only stored when the estimation was successful. Especially when numerical optimization is used, is it important to take into account that estimation can fail. Here we reject the experiment, and try again, until `crep` experiments have succeeded (if they all fail, the program would go in an infinite loop).
- At the end, a report is printed out.

```

#include <oxstd.oxh>
#import "bprobit"

main()
{
 decl probitobj, ct = 100, x, y, crep = 100, irep,
 ires, cfailed, params, parses;

 probitobj = new Bprobit();
 probitobj.Create(1, 1, 1, ct, 1); // create database
 probitobj.Deterministic(FALSE); // create constant

 x = ranu(ct, 1); // fixed during experiment
 y = zeros(ct, 1); // 0 as yet, created in replications
 probitobj.Append(x ~ y, {"x", "y"});

 probitobj.Select(Bprobit::Y_VAR, { "y" }); // formulate
 probitobj.Select(Bprobit::X_VAR, { "Constant", "x" });
 probitobj.SetSelSample(-1, 1, -1, 1); // full sample
 probitobj.SetPrint(FALSE); // no intermediate output
 params = parses = <>;
 for (irep = cfailed = 0; irep < crep;)
 {
 y = 1 + x + rann(ct, 1); // create new y variable
 y = y .< 1 .? 0 .: 1; // make into 0,1
 probitobj.Renew(y, {"y"}); // replace in database
 probitobj.ClearModel(); // force re-estimation

 ires = probitobj.Estimate();

 if (probitobj.GetModelStatus() != Bprobit::MS_ESTIMATED)
 {
 ++cfailed; // count no of failures
 continue; // failed: reject and try again
 }
 params ~ = probitobj.GetPar(); // store parameters
 parses ~ = probitobj.GetStdErr(); // and std errors
 ++irep; // next replication
 }
 println("No of successful replications: ",
 crep, " (", cfailed, " failed)");
 println("Sample size: ", ct);
 println("estimated parameters",
 "%c", {"mean-par", "sd-par", "mean-se", "sd-se"},
 meanr(params) ~ sqrt(varr(params)) ~
 meanr(parses) ~ sqrt(varr(parses)));

 delete probitobj;
}

```

*bprobitsim2>oxrun.dev*

- [11.8] For  $M = 100, N = 100$  we obtained:

```
No of successful replications: 100 (0 failed)
Sample size: 100
estimated parameters
 mean-par sd-par mean-se sd-se
-0.071007 0.27671 0.28120 0.0075460
 1.1531 0.61658 0.53563 0.037024
```

Interpret these results.

- [11.9] Modify the program to use the simulation class for the Monte Carlo experiment.
- [11.10] In (11.2) the binary variable  $y_i$  is used as a selection variable, whereas in (11.3) this selection is implemented through multiplication by 0 or 1. Can you find the (extreme) situations in which this is not the same (hint: compute the value of  $0 \times \infty$ )?
- [11.11] Extend the program to print the time it took to complete the Monte Carlo experiment.

#### 11.8.4 Parallel Monte Carlo

There are many reasons why the simulation loop in the previous program cannot be made parallel:

1. Concatenation must be local to the loop, but `params` and `parses` are made to grow inside the loop.
2. The loop counter is only updated when estimation succeeds.
3. The generated data is stored inside `probitobj`, but this is shared in all iterations.

All these can be fixed by marked variables as `serial`. But this largely defeats the purpose of parallel programming, and better solutions are available:

1. Allocate the results matrix outside the loop. Then we can store results for each iteration inside this matrix. This works, because only the content of the matrix changes, and each iteration does this at a different location.
2. Now we can move the loop counter update to the loop control. Failed replications correspond to result columns with missing values.
3. Make a copy of `probitobj` using the `clone` function before poking the new data inside it. This is now specific to the current iteration.

The following code shows how these three steps are implemented:

```

decl results = nans(2 * cp, crep); // allocate results
 bprobitsim3 (Part of)
parallel for (decl irep = 0; irep < crep; ++irep)
{
 decl obj = clone(probitobj); // make copy
 decl y = 1 + x + rann(ct, 1); // new y variable
 y = y .< 1 .? 0 .: 1; // make into 0,1
 obj.Renew(y, {"y"}); // replace in db of copy

 obj.ClearModel(); // force re-estimation
 if (obj.Estimate())
 {
 results[][irep] = obj.GetPar() | obj.GetStdErr();
 }
}
results = deletec(results); //remove failed experiments
println("No of successful replications: ",
 sizec(results), " (" , crep - sizec(results), " failed)");

```

## 11.9 Conclusion

If you made it this far you have certainly become an *expert* (to quote from van der Sluis, 1997). From now on we hope that you can spend less time on learning the computing language, and more on the econometric or statistical content of the problems you intend to solve. We wish you productive use of the Ox programming language.

# Appendix A1

## A debug session

OxEdit and OxMetrics has debug facilities, which can be useful to locate bugs in your programs. A debug session is started from the Run menu, for the active Ox file.

In debug mode, there is a command window at the bottom of the Ox Output window (with paths shortened):

```
1 ----- Ox-debug on
2 ----- OxMetrics10/ox/samples/myfirst.ox
3
4 Ox 10.04 (macOS_64/Parallel) (C) J.A. Doornik, 1994-2025 (oxlang.dev)
5 Entering debug mode, use quit to quit, help for command summary.
6 decl m1, m2; // declare two variables, m1 and m2
7 OxMetrics10/ox/samples/myfirst.ox (5): main break!
8 [(debug)]
```

Enter command

Ox-debug myfirst L 8 C 1

Set focus in the command window and press enter. This advances the program by one line:

```
1 ----- Ox-debug on
2 ----- OxMetrics10/ox/samples/myfirst.ox
3
4 Ox 10.04 (macOS_64/Parallel) (C) J.A. Doornik, 1994-2025 (oxlang.dev)
5 Entering debug mode, use quit to quit, help for command summary.
6 decl m1, m2; // declare two variables, m1 and m2
7 OxMetrics10/ox/samples/myfirst.ox (5): main break!
8 (debug)
9 m1 = unit(3); // assign to m1 a 3 x 3 identity matrix
10 OxMetrics10/ox/samples/myfirst.ox (7): main break!
11 (debug)
```

Enter command

Ox-debug myfirst L 10 C 1

The following actions are available:

- inspect the contents of variables;
- change the value of variables;
- set or clear a break point at a source code line;
- trace through the code step by step;
- trace by stepping over a function call;
- trace into a function call (the function must be written in Ox code, not a library function).

When in debug mode, the prompt is given as (debug). The commands are:

breakpoints:

```
break file:line - set breakpoint at line of file
break line - set breakpoint at line of current file
break function - set breakpoint at function
break class::func - set breakpoint at function member of class
clear file:line - clear breakpoint at line of file (also: cl)
clear line - clear breakpoint at line of current file
delete - delete all breakpoints (also: clear)
delete # - delete breakpoint number #
```

execution:

```
continue - continue to next breakpoint (also: go)
step - execute one code line (also: just enter key)
next - execute line, stepping over function calls
 (also: step over)
finish - step out of current function (also: step out)
quit - stop debugging
```

help and information:

```
help - debug command summary (also: ?)
print variable - print the value of the named variable
print # - print variable by number
info breakpoints - list all breakpoints
info functions - list functions in program
info stack - list call stack (also: bt)
info variables - list all variables (also: ??)
info all - list all variables with values (also: ???)
trace - lists executed pseudo code
trace off - switches trace off
```

other:

```
>expression - enter an Ox expression, e.g. >x[0][0]=1 or >println(x)
```

Command words can be shortened to one letter.

Filename is without path and need not have extension.

First we list the program being debugged (samples/myfirst.ox), with line numbers in bold in the margin:

```
1 #include <oxstd.oxh>// include the Ox standard library header

3 main() // function main is the starting point
4 {
5 decl m1, m2; // declare two variables, m1 and m2

7 m1 = unit(3); // assign to m1 a 3 x 3 identity matrix
8 m1[0][0] = 2; // set top-left element to 2
9 m2 = <0,0,0;1,1,1>;// m2 is a 2x3 matrix, the first row
 // consists of zeros, the second of ones
```

```

12 print("two matrices", m1, m2); // print the matrices
13 }

```

Here is a session with `myfirst.ox`, continuing from the first step taken at the start. The bold text is entered in the command window, and echoed in the output (but we removed the echoing of the current source code line):

```

myfirst.ox (7): break!

(debug) break 9
(debug) go
myfirst.ox (9): break!
(debug) ??
=== local variables ===
 1 m1[3] [3] matrix 2 ...
 2 m2 empty .Null

myfirst.ox (9): break!
(debug) ?m1
m1[3] [3] matrix
 2.0000 0.0000 0.00000
 0.00000 1.0000 0.00000
 0.00000 0.00000 1.0000

(debug) > m1[1][1] = -20;
(debug) ?m1
m1[3] [3] matrix
 2.0000 0.0000 0.00000
 0.00000 -20.000 0.00000
 0.00000 0.00000 1.0000

(debug) step
myfirst.ox (12): break!
(debug)
two matrices
 2.0000 0.0000 0.00000
 0.00000 -20.000 0.00000
 0.00000 0.00000 1.0000

 0.00000 0.00000 0.00000
 1.0000 1.0000 1.0000
myfirst.ox (13): break!
(debug) quit

```

- **break 9** sets a breakpoint at line 9 of the current source file.
- **go** runs the program until a break is encountered.
- **??** lists all the variables which are visible within the current scope. We can see that `m1` is a  $3 \times 3$  matrix (element 0,0 is also given); `m2` has not been assigned a value yet, and is listed as (null).
- **?m1** prints the `m1` variable. Only variable names are allowed after the question mark. To print part of a matrix use `print, e.g. print(m1[0][1:])`;
- **>m1[1][1] = -20;** changes the second diagonal element. The code must be valid Ox code, so do not forget the terminating semicolon!
- Just pressing enter does one step in the code, leading to line 12. The next enter runs to line 13, executing the `print` statement in the code.
- **#quit** aborts the debug session.



# References

- Amemiya, T. (1981). Qualitative response models: A survey. *Journal of Economic Literature* 19, 1483–1536.
- Cramer, J. S. (1986). *Econometric Applications of Maximum Likelihood Methods*. Cambridge: Cambridge University Press.
- Cramer, J. S. (1991). *The LOGIT Model: An Introduction for Economists*. London: Edward Arnold.
- Davidson, R. and J. G. MacKinnon (1993). *Estimation and Inference in Econometrics*. New York: Oxford University Press.
- Doornik, J. A. (2026). *Object-Oriented Matrix Programming using Ox* (10th ed.). London: Timberlake Consultants Press.
- Finney, D. J. (1947). The estimation from individual records of the relationship between dose and quantal response. *Biometrika* 34, 320–334.
- Fletcher, R. (1987). *Practical Methods of Optimization*, (2nd ed.). New York: John Wiley & Sons.
- Gill, P. E., W. Murray, and M. H. Wright (1981). *Practical Optimization*. New York: Academic Press.
- Hendry, D. F. (1995). *Dynamic Econometrics*. Oxford: Oxford University Press.
- Hendry, D. F. and J. A. Doornik (2001). *Empirical Econometric Modelling using PcGive: Volume I* (3rd ed.). London: Timberlake Consultants Press.
- Judge, G. G., R. C. Hill, W. E. Griffiths, H. Lütkepohl, and T.-C. Lee (1988). *Introduction to the Theory and Practice of Econometrics* (2nd ed.). New York: John Wiley.
- McFadden, D. L. (1984). Econometric analysis of qualitative response models. In Z. Griliches and M. D. Intriligator (Eds.), *Handbook of Econometrics*, Volume 2, Chapter 24. Amsterdam: North-Holland.
- Press, W. H., B. P. Flannery, S. A. Teukolsky, and W. T. Vetterling (1988). *Numerical Recipes in C*. New York: Cambridge University Press.
- Ripley, B. D. (1987). *Stochastic Simulation*. New York: John Wiley & Sons.
- van der Sluis, P. J. (1997). EmmPack 1.0: C/C++ code for use with Ox for estimation of univariate stochastic volatility models with the efficient method of moments. *Studies in Nonlinear Dynamics and Econometrics* 2, 77–94.



# Subject Index

- ++ 28
- 28
- .? .: dot conditional operator 28
- .Inf 57
- .NaN 56
- .last() 21
- .null() 55
- != is not equal to 24
- ! logical negation 39
- ' transpose 21, 22
- \*\* Kronecker product 21
- \* multiplication 21
- + addition 24
- , comma expression 26
- subtraction 24
- .! = is not dot equal to 24
- . \* dot multiplication 24
- ./ dot division 24
- .<= dot less than or equal to 24
- .< dot less than 24
- .= is dot equal to 24
- .>= dot greater than or equal to 24
- .> dot greater than 24
- .? .: dot conditional expression 27
- .&& logical dot-AND 25
- .^ dot power 24, 29
- .|| logical dot-OR 25
- . member reference 59, 67
- / division 21
- <= less than or equal to 24
- < less than 24
- == is equal to 24
- = assignment 26
- >= greater than or equal to 24
- > greater than 24
- ? : conditional expression 27
- [] indexing 20
- && logical AND 25
- & reference operator 19
- ~ horizontal concatenation 10, 12, 21, 29
- ^ power 21
- || logical OR 25
- | vertical concatenation 21
- Addition, row vector and column vector 21
- Arguments 15
- Arrays 55
  - keyword — 55
  - Multidimensional — 55
- Assignment operators 26
- Backspace character 53
- Base class 61
- Boolean shortcut 25
- break 37
- Class 58
- class 71
- Class declaration 71
- Classes 66
- columns() 11
- Comment 8
- Compilation 45
- Compilation errors 6
- Concatenation 10, 22
- Conditional operators 27
- Conditional statements 38
- const 15
- constant() 13
- Constants 12
- Constructor function 59, 66, 71
- continue 37
- Convergence 43
- Data members 72
- Database 58
- Database class 33, 67
- Debugger 94
- decl 11
- delete 68

- deleteifc() 26
- deleteifr() 26
- Destructor function 59, 66
- Division 22
- Documentation 1
- Dot operators 24
- Double 8
- DrawTMatrix() 51
- DrawXMatrix() 51
- else 38
- Equality operators 24
- Errors 6, 22
- Escape sequence 53
- Excel 31, 32
- External variables 43
- FALSE 24
- Folder names in Ox code 31
- do while loops 36
- for loops 35
- while loops 36
- foreach loops 37
- format() 54
- Formats 54
- Function 14
  - arguments 15
  - as argument 40
  - declaration 17
  - Multiple returns 17
  - Returning a value 15
  - Returning a value in an argument 18
- Global variables 43
- Graphics 6, 50
- Header file 9, 45
- Help 1, 3
  - index 2
- Hessian matrix 79
- Horizontal concatenation 10, 22
- Hungarian notation 48
- Identifiers 11
- Identity matrix 13
- if 38
- import 18
- #import 34, 42, 45
- #include 9
- #include 45, 46
- Including a file 9
- Index operators 20
- Inf 57
- Infinity 57
- Inheritance 61, 66, 73
- Input 30
- Installation 1
- Integer 8
- Keyword arrays 55
- Lambda functions 46
- Linking using #import 42, 45
- loadmat() 30
- local functions 46
- Logical operators 25
- Loops 35–38
- Lotus 32
- main() 9
- Matrix 8
- Matrix constants 12
- Matrix file 31
- Matrix operators 21
- MaxBFGS
  - Convergence 43
- MaxBFGS() 40, 41, 79
- MaxControl() 79
- MaxConvergenceMsg() 79
- Maximization 40, 78
- Maximum Likelihood 43, 77
- Member function 71
- Members 66
- Missing values 56
- Monte Carlo 68, 69, 91
  - One replication 90
- Multidimensional arrays 55
- Multiple returns 17
- Multiplication 22
- NaN 56
- Negation 28
- new 67
- Newline character 53
- Object 58
- Object-oriented programming 58–63, 66
- Objects 66
- ones() 13
- Operator precedence 28
- Output 30
- Output formats 54

- Ox data file (oxdata, .in7/.bn7) 32
- Ox version 1
- OxEdit 3
- oxl 5
- OxMetrics 4, 31
- OxMetrics data file (oxdata, .in7/.bn7) 32
- .oxo file 45
- oxrun.dev 2
  
- parallel for loops 38
- Path names in Ox code 31
- PcFiml class 67
- PcGive data file (oxdata, .in7/.bn7) 32
- pdf 51
- pi = 3.1415... 43
- Power 22
- print() 11
- Print formats 54
- Probit 76, 77
- Program organization 45
  
- Quantiles 69
  
- range() 13
- Regression 43, 67
- Relational operators 24
- Return
  - Multiple —s 17
- return 15
- Rosenbrock function 40
- rows() 11
- Run-time errors 6
- Running Ox 2
  
- SaveDrawWindow() 51
- savemat() 30
- scan() 55
- Scope 43
- selectifc() 26
- selectifr() 26
- ShowDrawWindow() 51
- Simulation 68, 69
- Simulation class 70, 75
- Spreadsheet files 32
- sprint() 53
- Statements 10
- Static variables 43, 48
- String operators 52
- Strings 52
- Style 11, 48
- svg 51
  
- Syntax colouring 9
  
- Timing programs 39
- Transpose 22
- TRUE 24
  
- unit() 13
  
- Variable type 8
- vecindex() 26
- Vectorization 39
- Virtual functions 66, 74
  
- WKS,WK1 files 32
  
- XLS files 32
  
- zeros() 13